


ELEVATION VIEW

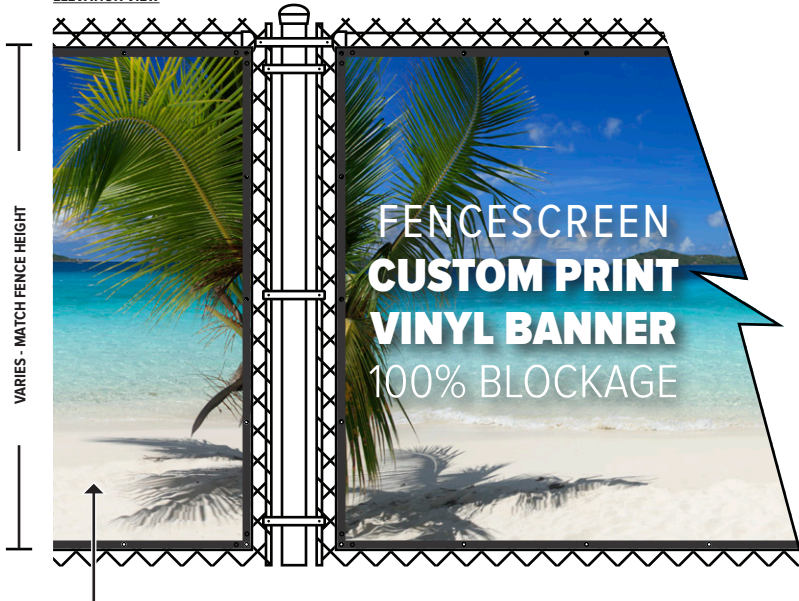

- FENCESCREEN PANELS WELDED FINISH EDGES FOR REINFORCEMENT
- #2 BLACK MILITARY GRADE COATED BRASS, SPACED 24" ON ALL SIDES
- ATTACH TO FENCE WITH FENCESCREEN FASTENERS


FENCESCREEN MATERIAL SPECIFICATIONS

MATERIAL COMPOSITION: MAXFLEX PROPRIETARY PVC SOLID VINYL W/ UV-ADDITIVES


INK COMPOSITION: ULTRA HIGH-DEF., CMYK MAXFLEX UV-INK, 300% INK STRETCH

PROPERTIES	RESULTS
Weight	450 g/m ²
Grab Tensile	230/200 lbs.
Base Fabric	12x12 1000 Denier
1" Strip Tensile Strength	100W x 55F
Flame Resistance	Not consumed within 2 min.
Shade Percentage	100%

ATTACHMENT DETAIL 3D

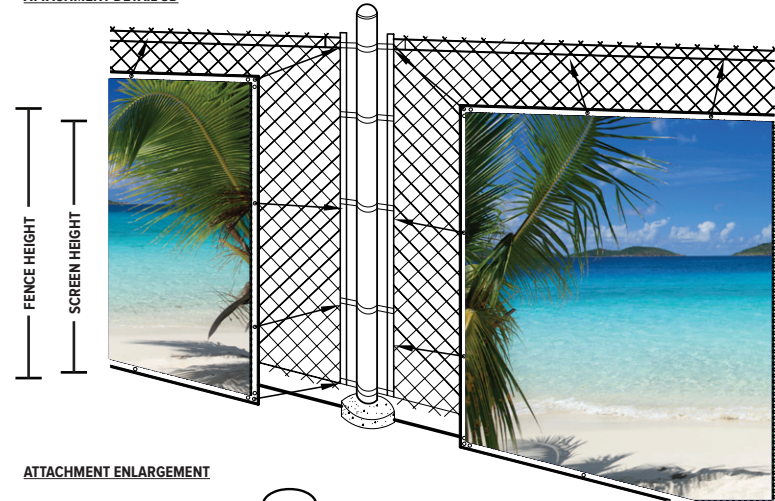

ATTACHMENT ENLARGEMENT

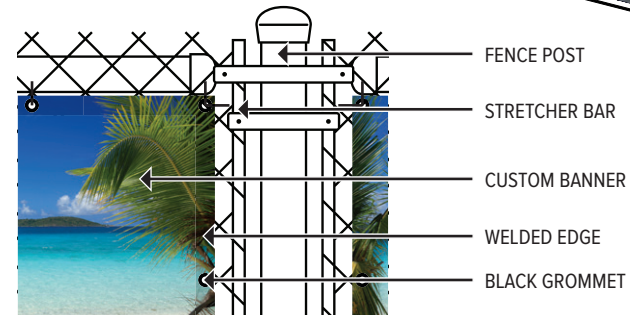

NOTE:

- INSTALL PER FENCESCREEN MANUFACTURER RECOMMENDATION
- REFER TO STRUCTURAL PLANS FOR ALL FOOTING SIZE

AVAILABLE DESIGNS FOR PRINT (USING CMYK COLOR INK):



**212
SERIES**

**PRINTED PATIO
SCREEN**



DRAWING # 212-PATIO CUSTOM

**888-313-6313
WWW.FENCESCREEN.COM**