


ELEVATION VIEW

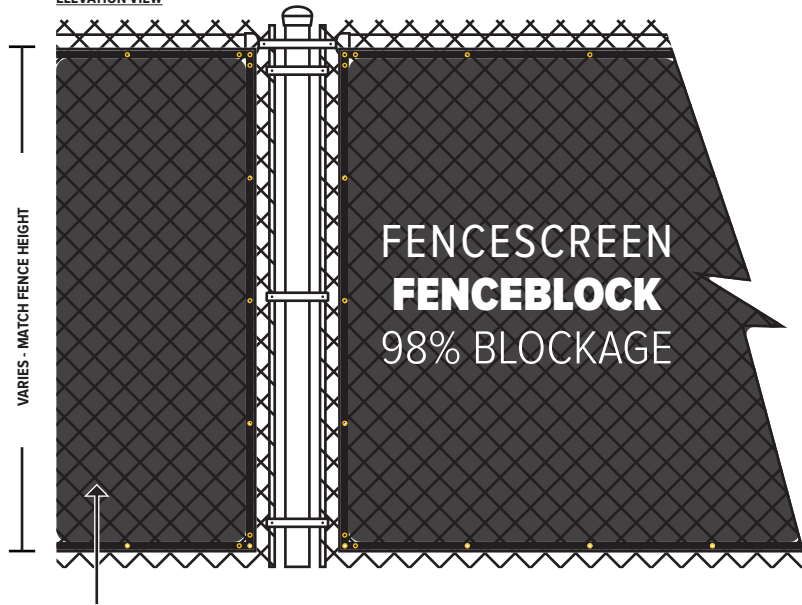


- FENCESCREEN PANELS WITH 2" POLYPROPYLENE WEBBING FOR EDGE REINFORCEMENT.
- 3/8" BRASS GROMMETS AT 24" ON CENTER ATTACH TO FENCE WITH FENCESCREEN FASTENERS OR GALVANIZED HOG RINGS.

FENCESCREEN MATERIAL SPECIFICATIONS


MATERIAL COMPOSITION: WOVEN HIGH DENSITY POLYPROPYLENE

| PROPERTIES | RESULTS |
|---|-------------------------------------|
| Construction (tapes/inch) | Warp: 20 Weft: 10 |
| Tenacity (lb/inch) | Warp: > 60 Weft: > 90 |
| Material Weight | 141 g/m ² |
| U.V. Resistance (70% Tenacity Retained After 200 Hours) | Warp: 85 Weft: 85 |
| Water Permeability | 4.2 gallons/yd ² /second |
| Shade / Wind Blockage | 98% |

ATTACHMENT DETAIL 3D

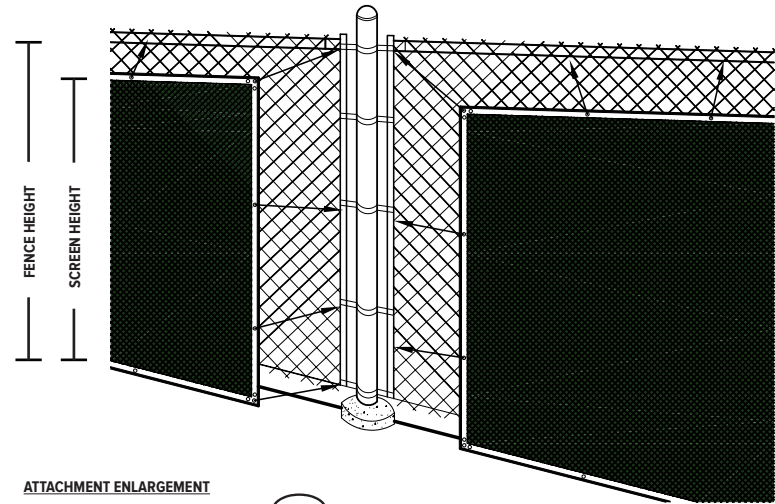

ATTACHMENT ENLARGEMENT

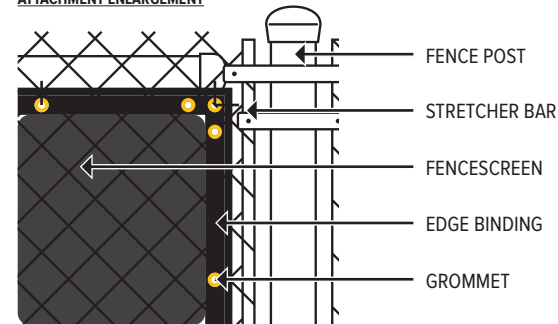

NOTE:

- INSTALL PER FENCESCREEN MANUFACTURER RECOMMENDATION
- REFER TO STRUCTURAL PLANS FOR ALL FOOTING SIZE

AVAILABLE COLORS:



BLACK

**100
SERIES**

FENCEBLOCK



DRAWING # **PS100 FenceBlock**

888-313-6313
WWW.FENCESCREEN.COM