


ELEVATION VIEW

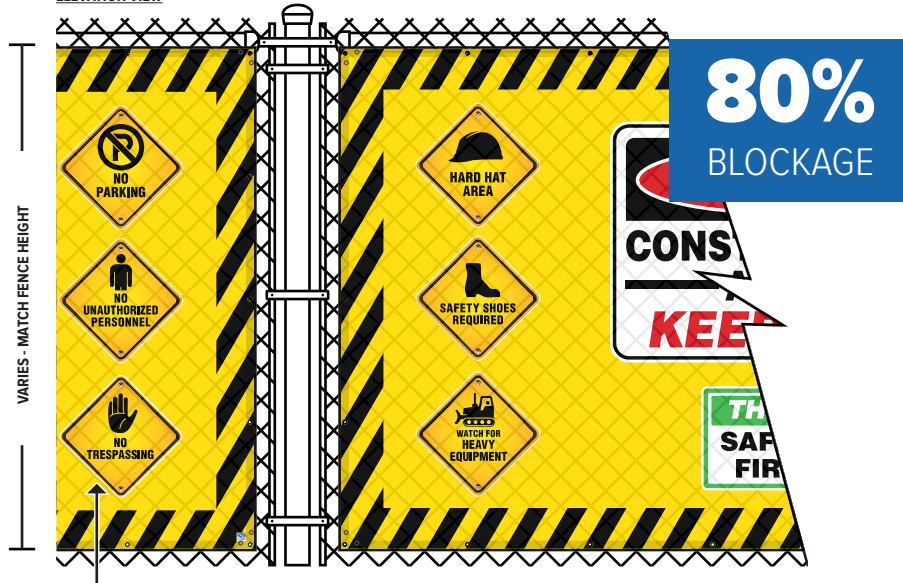

- FENCESCREEN PANELS WELDED FINISH EDGES FOR REINFORCEMENT
- #2 BLACK MILITARY GRADE COATED BRASS, SPACED 24" ON ALL SIDES & TRIPLE GROMMET CORNERS
- ATTACH TO FENCE WITH FENCESCREEN FASTENERS OR GALVANIZED HOG RINGS

FENCESCREEN MATERIAL SPECIFICATIONS

MATERIAL COMPOSITION: MAXFLEX PROPRIETARY PVC MESH W/ UV-ADDITIVES


INK COMPOSITION: ULTRA HIGH-DEF., CMYK MAXFLEX UV-INK, 300% INK STRETCH

PROPERTIES	RESULTS
Weight	290 g/m ²
Tensile Strength	1400 x 1400 N/5cm
Tear Strength	300 x 300 N/5cm
Air Permeability	2650 mm/sec
Flame Resistance	NFPA701, Title 19, CSM, ASTM E84
Shade Percentage	80%

ATTACHMENT DETAIL 3D



ATTACHMENT ENLARGEMENT

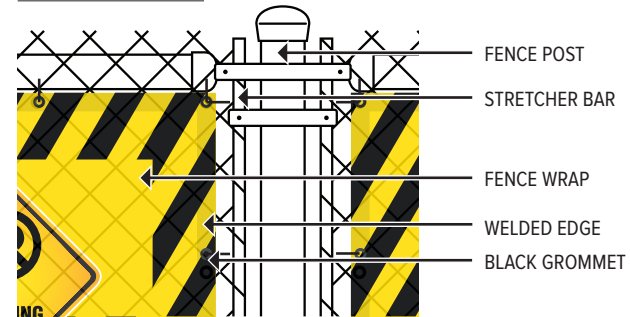

NOTE:

- INSTALL PER FENCESCREEN MANUFACTURER RECOMMENDATION
- REFER TO STRUCTURAL PLANS FOR ALL FOOTING SIZE

AVAILABLE COLORS:



**213
SERIES**

**SAFETY GATE YELLOW
CLASSIC DESIGN**



DRAWING # FS213SGY5 SAFETY GATE 80%

**888-313-6313
WWW.FENCESCREEN.COM**