


ELEVATION VIEW

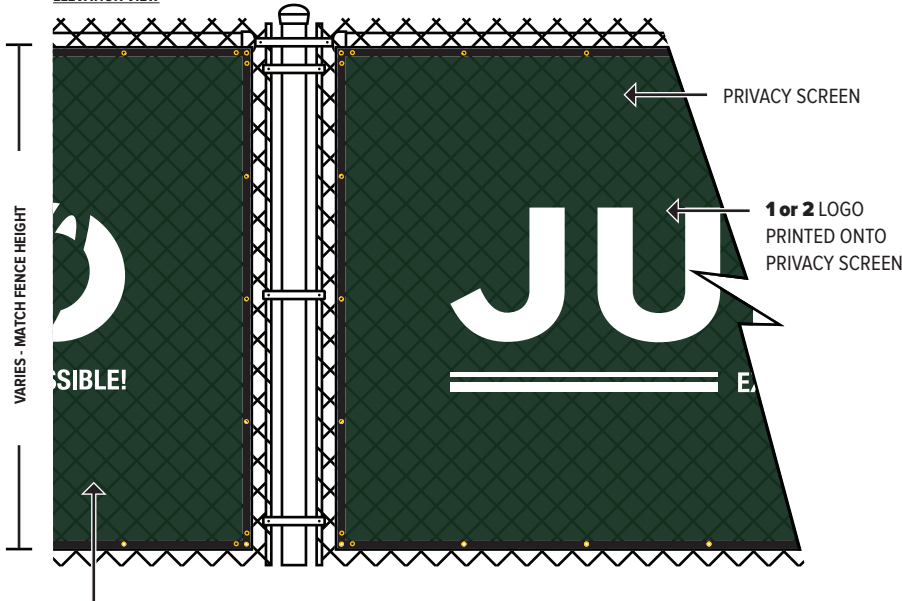

- FENCESCREEN PANELS WELDED FINISH EDGES FOR REINFORCEMENT
- #2 MILITARY GRADE BRASS GROMMETS, SPACED 24" ON ALL SIDES



### FENCESCREEN MATERIAL SPECIFICATIONS

**MATERIAL COMPOSITION:** KNITTED HIGH DENSITY POLYETHYLENE (HDPE)

PROPERTIES	RESULTS
Filament Strength	50 lbs. per ft.
Material Break Strength	500 lbs. per ft.
Material Weight	175 g/m <sup>2</sup>
Crystalline Melt Point	133° C
Composition of UV Inhibitor	1.5% Amplas CM111821 / 1.5% Equaster CM
Flamability Point	364° C
Shade / Wind Blockage	90%

ATTACHMENT DETAIL 3D

YOUR CHOICE OF 1 LOGO OR 2 LOGOS  
DIRECTLY PRINTED ON PRIVACY SCREEN

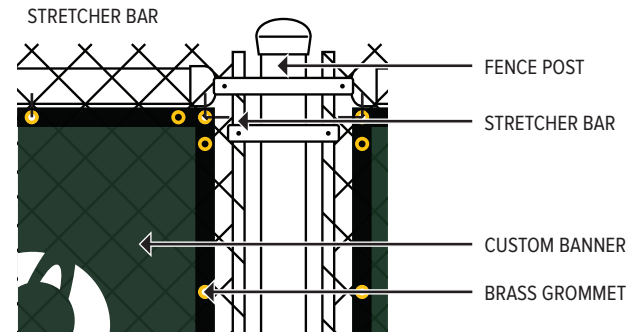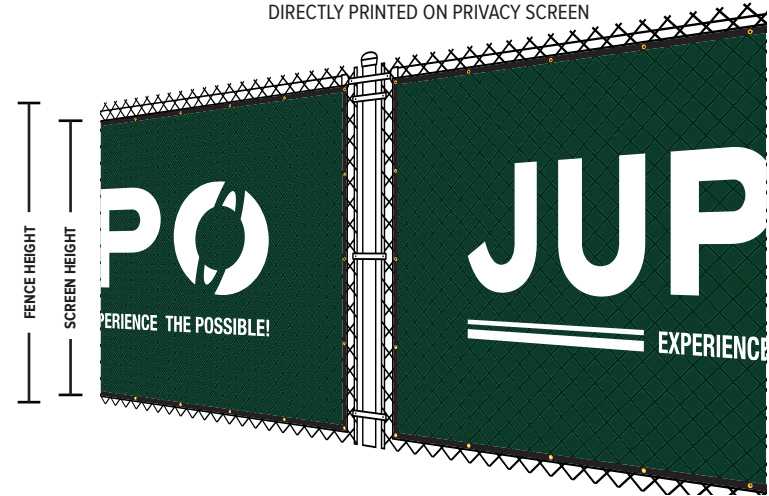

**NOTE:**

- INSTALL PER FENCESCREEN MANUFACTURER RECOMMENDATION

**AVAILABLE FABRIC COLORS FOR PRINT (USING CMYK COLOR INK):**



**111  
SERIES**

**LOGOS PRINTED ON  
BUILDER LOGO ROLL**



DRAWING # PS111-LOGOBUILDERROLL

**888-313-6313  
WWW.FENCESCREEN.COM**