



ELEVATION VIEW

**FENCESCREEN
100 SERIES
FENCEBLOCK
96% BLOCKAGE**

FENCESCREEN PANELS WITH 2" POLYPROPELENE WEBBING FOR EDGE REINFORCEMENT.
3/8" BRASS GROMMETS @ 24" O.C.
ATTACH TO FENCE WITH FENCESCREEN ATTACHMENT TIES OR GALV. HOG RINGS.

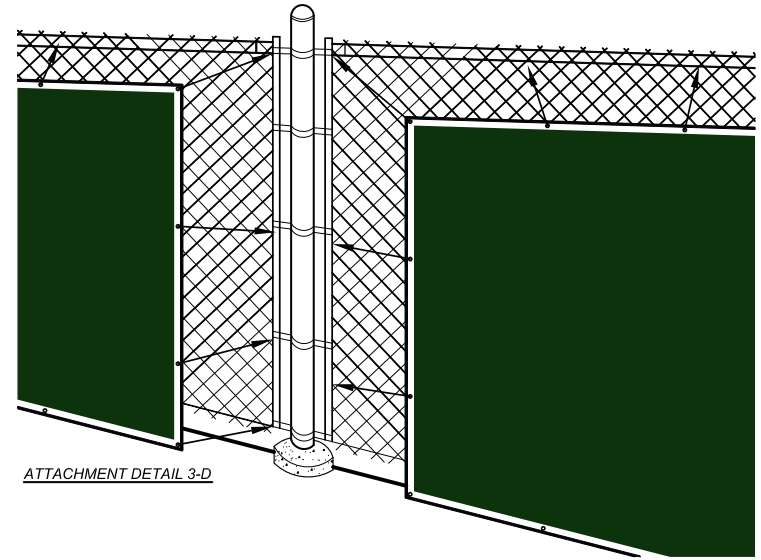

ATTACHMENT DETAIL 3-D

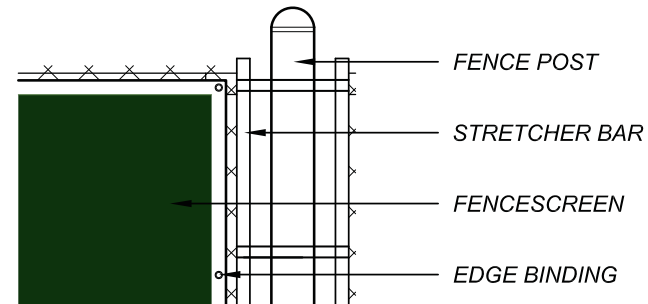

ATTACHMENT ENLARGEMENT

NOTE:

1. INSTALL PER FENCESCREEN MANUFACTURER RECOMMENDATIONS.
2. REFER TO STRUCTURAL PLANS FOR ALL FOOTING SIZES.

AVAILABLE COLORS:

BASALT GREEN



FENCESCREEN SPECIFICATIONS

MATERIAL COMPOSITION: KNITTED HIGH DENSITY (HD) POLYPROPYLENE

PROPERTIES	TEST METHOD	RESULTS
TEAR STRENGTH	ASTM D-4533	40 LBS.
PUNCTURE STRENGTH	ASTM D-4833	50 LBS.
MULLEN BURST STRENGTH	ASTM D-3786	300 PSI
UV STABILITY @ 500 HOURS	ASTM D-4355	70% RETENTION
SHADE PERCENTAGE		96%

DRAWINGS NOT TO SCALE

DETAIL NAME:

**FENCEBLOCK
100 SERIES**



DRAWING # **FENCEBLOCK 100**

PHONE: 1.888.313.6313
WWW.FENCESCREEN.COM