



FENCESCREEN PANELS W/2" POLYPROPYLENE WEBBING FOR EDGE REINFORCEMENT. 3/8" BRACE GROMMETS @ 24" O.C. ATTACH TO FENCE W/STEEL HOG RINGS OR HEAVY DUTY ZIP TIES



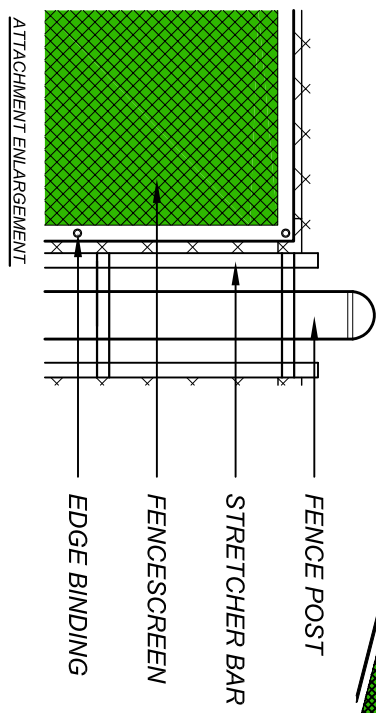

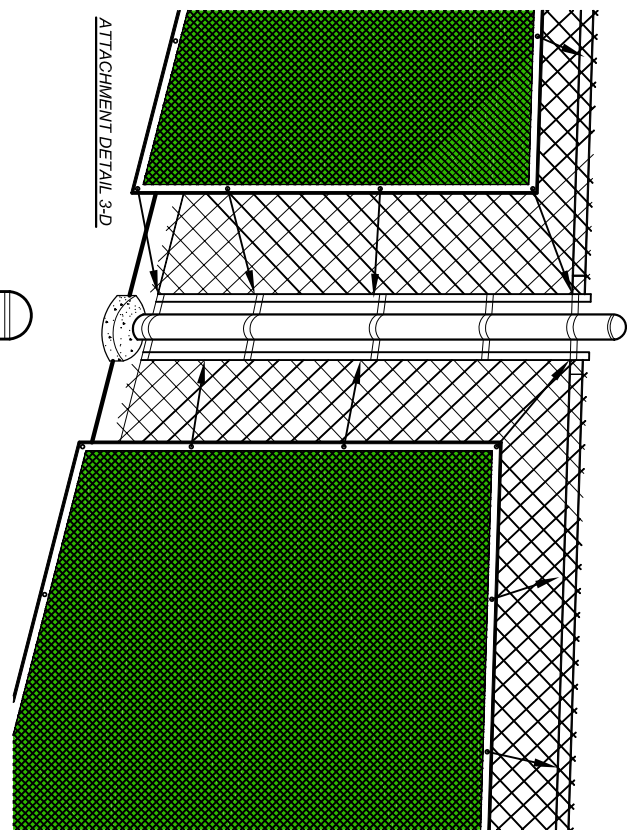

FENCESCREEN SPECIFICATIONS

MATERIAL COMPOSITION: KNITTED (HDPE) HIGH DENSITY. POLYETHYLENE

PROPERTIES	TEST METHOD	RESULTS
WEIGHT	ASTM D-5041	145 GRAM/SQ. METER
MATERIAL BREAK STRENGTH		500 LBS. PER FT.
MATERIAL COMPOSITION		KNITTED POLYETHYLENE
SHADE PERCENTAGE		88%

- NOTE:**
1. INSTALL PER FENCESCREEN MANUFACTURER RECOMMENDATIONS- #888.313.6313
 2. REFER TO STRUCTURAL PLANS FOR ALL FOOTING SIZE

COLOR TO BE PER FENCESCREEN COLORS:

			
GREEN	BLACK	BROWN	TAN

NO SCALE

DETAIL NAME:

PRIVACY SCREEN- 88% BLOCKAGE



DRAWING # PS 200

PHONE # 888-313-6313
WWW.FENCESCREEN.COM