



ELEVATION VIEW

**FENCESCREEN
300 SERIES
COMMERCIAL
CLOSED POLY
90% BLOCKAGE**

FENCESCREEN PANELS WITH 2" POLYPROPELENE WEBBING FOR EDGE REINFORCEMENT.
3/8" BRASS GROMMETS @ 24" O.C.
ATTACH TO FENCE WITH FENCESCREEN ATTACHMENT TIES OR GALV. HOG RINGS.

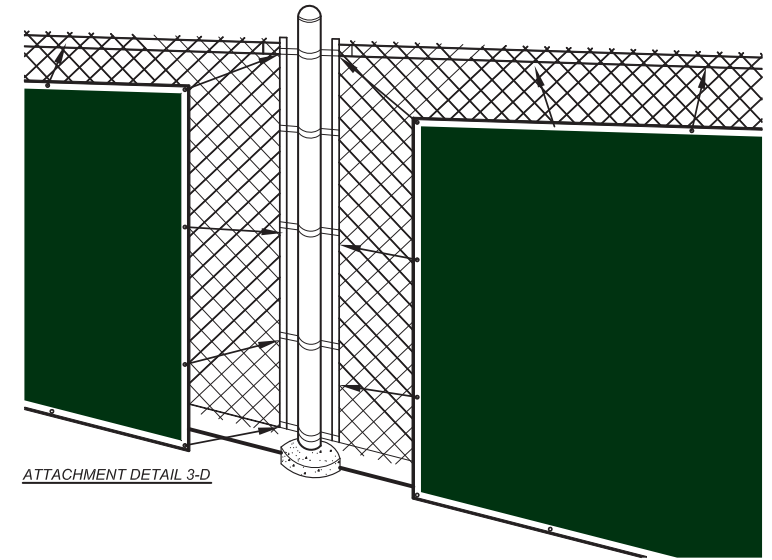

ATTACHMENT DETAIL 3-D

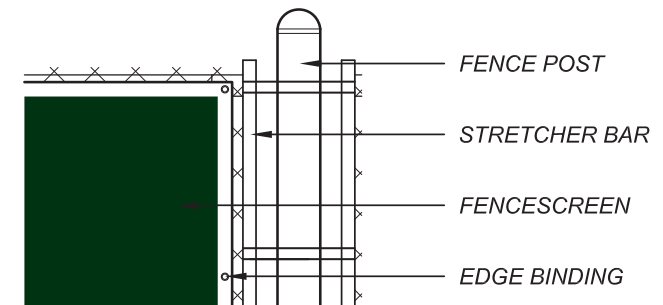

ATTACHMENT ENLARGEMENT

FENCESCREEN SPECIFICATIONS

POLYPROPYLENE (PP) WOVEN. UV INHIBITORS

PROPERTIES	TEST METHOD	RESULTS
WEIGHT	ASTM D-5041	5.5 (OZ./YD)
WARP TENSILE	ASTM D-5100	420 LBS.
WARP TEAR	ASTM D-2261	125 LBS.
FILL TENSILE	ASTM D-5100	225 LBS.
FILL TEAR	ASTM D-5512	90 LBS.
AIR FLOW	ASTM D-737	150 LBS.
SHADE PERCENTAGE		90%

NOTE:

1. INSTALL PER FENCESCREEN MANUFACTURER RECOMMENDATIONS.
2. REFER TO STRUCTURAL PLANS FOR ALL FOOTING SIZES.

AVAILABLE COLORS:

DARK GREEN, BLACK



DRAWINGS NOT TO SCALE

DETAIL NAME:

**COMMERCIAL CLOSED POLY
300 SERIES**



DRAWING # **COMMERCIAL 300**

PHONE: 1.888.313.6313
WWW.FENCESCREEN.COM