



ELEVATION VIEW

**FENCESCREEN  
300 SERIES  
COMMERCIAL  
CLOSED POLY  
90% BLOCKAGE**

FENCESCREEN PANELS WITH 2" POLYPROPYLENE WEBBING FOR EDGE REINFORCEMENT.  
3/8" BRASS GROMMETS @ 24" O.C.  
ATTACH TO FENCE WITH FENCESCREEN ATTACHMENT TIES OR GALV. HOG RINGS.

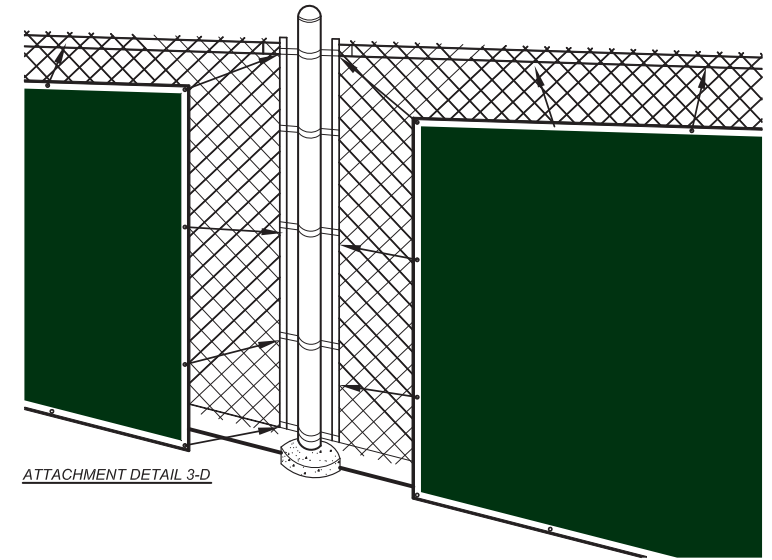

ATTACHMENT DETAIL 3-D

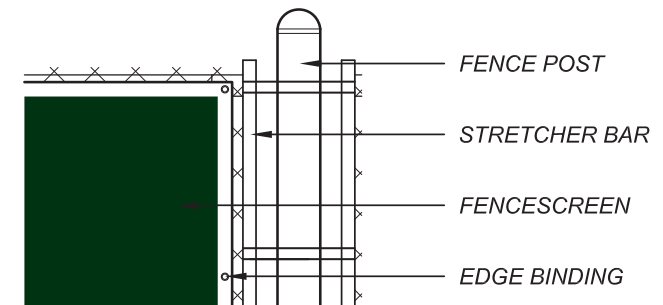

ATTACHMENT ENLARGEMENT

### FENCESCREEN SPECIFICATIONS

#### POLYPROPYLENE (PP) WOVEN. UV INHIBITORS

PROPERTIES	TEST METHOD	RESULTS
WEIGHT	ASTM D-5041	5.5 (OZ./YD)
WARP TENSILE	ASTM D-5100	420 LBS.
WARP TEAR	ASTM D-2261	125 LBS.
FILL TENSILE	ASTM D-5100	225 LBS.
FILL TEAR	ASTM D-5512	90 LBS.
AIR FLOW	ASTM D-737	12%
SHADE PERCENTAGE		90%

#### NOTE:

1. INSTALL PER FENCESCREEN MANUFACTURER RECOMMENDATIONS.
2. REFER TO STRUCTURAL PLANS FOR ALL FOOTING SIZES.

#### AVAILABLE COLORS:

DARK GREEN, BLACK



DRAWINGS NOT TO SCALE

DETAIL NAME:

**COMMERCIAL CLOSED POLY  
300 SERIES**



DRAWING # **COMMERCIAL 300**

**PHONE: 1.888.313.6313**  
**WWW.FENCESCREEN.COM**