


311 SERIES

CUSTOM PRINTED FLEX MESH


Elevation View

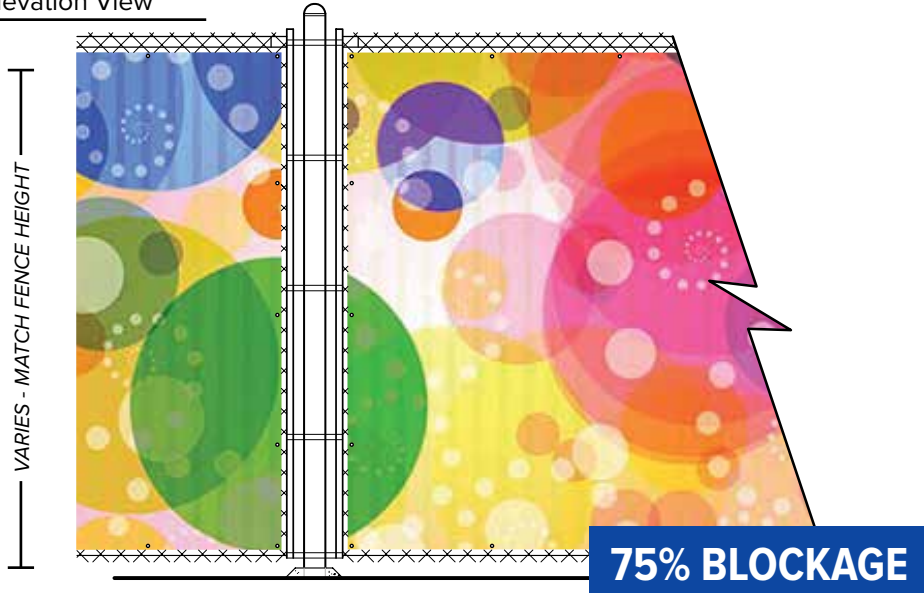

FENCESCREEN PANELS WITH FINISHED EDGE REINFORCEMENT. 3/8" BRASS GROMMETS AT 24" ON CENTER ATTACH TO FENCE WITH FENCESCREEN FASTENER OR GALVANIZED HOG RINGS.

Attachment Enlargement

Detail View

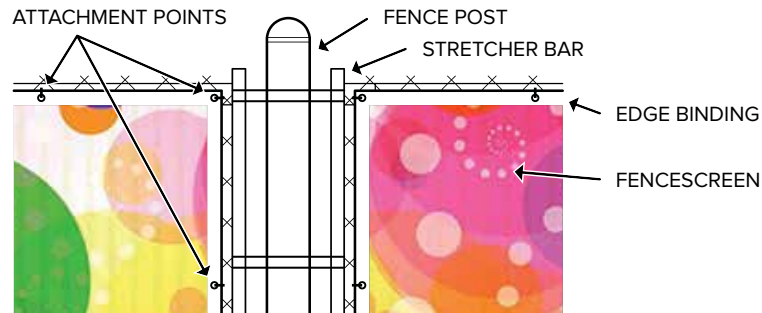

NOTE:

- INSTALL PER FENCESCREEN MANUFACTURER RECOMMENDATIONS.
- REFER TO STRUCTURAL PLANS FOR ALL FOOTING SIZES.
- MATERIAL IS PRINTED ONE SIDE ONLY, NEUTRAL WHITE ON REVERSE.

FENCESCREEN PROPERTIES

PROPERTIES	TEST METHOD	RESULTS
Weight		9.1 oz/y ²
Breaking Strength	ASTM D-757 GRAB	160W x 120F
1" Strip Tensile Strength	ASTM D-751B	100W x 55F
Puncture Resistance	ASTM D751	230
Flame Resistance	NFPA 701	AF=2 sec, Chore 17 ID
Ink Adhesion		Excellent
Shade Percentage		75%

MATERIAL COMPOSITION

Custom Printed Flex Mesh is made from a proprietary Fencescreen formula polyvinyl chloride (PVC) mesh designed for outdoor ink adhesion and maximum flexibility.

DURABILITY

PVC Fence Products are resistant to: severe weather conditions, salt water, sand, road dirt, most acids, alcohol, alkaline, ammonia, petroleum distillates and common environmental pollutants.

MAINTENANCE

Pressure cleaning of surface contaminants is quickly accomplished with plain water.

WIND LOAD DISCLAIMER

Fencescreen will not be responsible for fence damage resulting from wind load conditions due to insufficient structural support.

FEATURES

- UV stabilized to protect against the harmful rays of the sun.
- Available in any custom size.
- Open mesh design allows for maximum airflow.
- Perfect for jobsite advertising

Available Colors

Custom printed colors to be chosen by customer, process CMYK color range on white base material.



Drawings not to scale.

Detail Name:
311 Series Custom Printed Flex Mesh Screen

Drawing Number:
311 - FLEX MESH CUSTOM



PHONE: 1.888.313.6313

| www.FenceScreen.com