



ELEVATION VIEW

**FENCESCREEN
400 SERIES
SOLID VINYL
100% BLOCKAGE**

FENCESCREEN PANELS WITH 2" POLYPROPYLENE WEBBING FOR EDGE REINFORCEMENT.
3/8" BRASS GROMMETS @ 24" O.C.
ATTACH TO FENCE WITH FENCESCREEN ATTACHMENT TIES OR GALV. HOG RINGS.

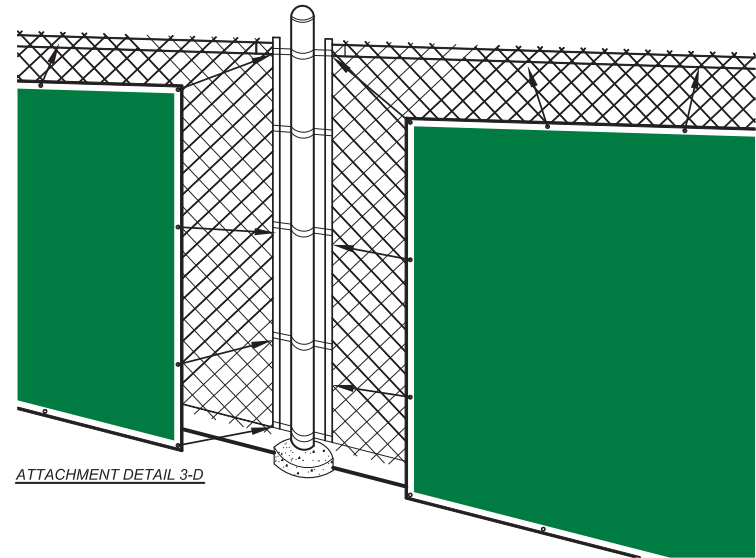

ATTACHMENT DETAIL 3-D

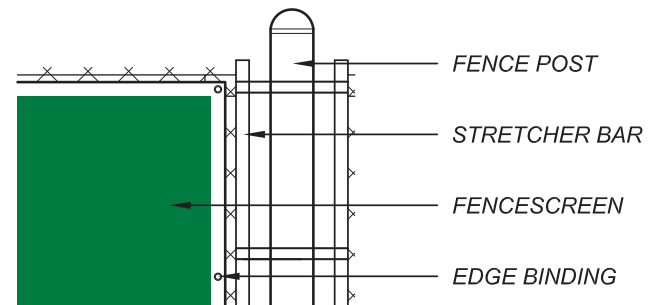

ATTACHMENT ENLARGEMENT

FENCESCREEN SPECIFICATIONS

PROPERTIES	TEST METHOD	RESULTS
WEIGHT	ASTM D-5041	13.2 (OZ / YD)
WARP TENSILE	ASTM D-5100	238 LBS.
WARP TEAR	ASTM D-2261	132 LBS.
FILL TENSILE	ASTM D-5100	233 LBS.
FILE TEAR	ASTM D-5512	126 LBS.
HYDROSTATIC RESIST	ASTM D-5512	375 LBS.
SHADE PERCENTAGE		100%

NOTE:

1. INSTALL PER FENCESCREEN MANUFACTURER RECOMMENDATIONS.
2. REFER TO STRUCTURAL PLANS FOR ALL FOOTING SIZES.

AVAILABLE COLORS:

GREEN, BLACK, BROWN, TAN, ROYAL BLUE, NAVY BLUE, RED, WHITE, GREY



DRAWINGS NOT TO SCALE

DETAIL NAME:

**SOLID VINYL
400 SERIES**



DRAWING # **SOLID VINYL 400**

PHONE: 1.888.313.6313
WWW.FENCESCREEN.COM