



# 4000B SERIES

## DOUBLE WALL BOTTOM LOCK FENCE SLATS

Elevation View

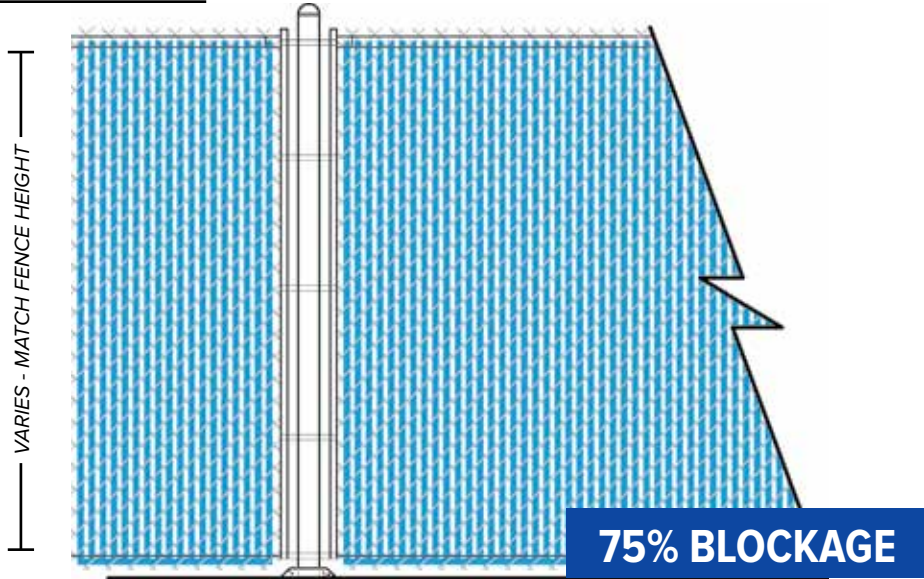

### SLAT PROFILE



### Available Colors


Green, Black, Redwood, Royal Blue, Light Blue, Brown, Gray, Tan, White.



### Attachment Enlargement


#### STEP 1

Insert rail horizontally in first full diamond at bottom of fence with open side facing up.



#### STEP 2

Insert vertical slats with interlocking tab downward. Slat engages and interlocks with bottom rail.



#### STEP 3

Push the vertical slat into the horizontal channel to lock-in place.



## FENCESCREEN PROPERTIES

PROPERTIES	RESULTS
Melt Index	.6
Density	.957
Minimum Temp.	-76° F
Maximum Temp.	250° F
Tensile Strength	3,700 psi
Slat Width	1 <sup>3</sup> / <sub>32</sub> "
Mesh Size	2"
Standard Heights	4, 5, 6, 7, 8, 10 and 12 feet
Wire Gauge	8, 9 or 11
Slats Per Box	82
Average Coverage Per Box	10 linear feet

### MATERIAL CONSTRUCTION

Double Wall Bottom Lock Fence Slats are made from extruded High Density Polyethylene (HDPE), color pigments and UV inhibitors.

### DURABILITY

HDPE Fence Products are resistant to: severe weather conditions, salt water, sand, road dirt, most acids, alcohol, alkaline, ammonia, petroleum distillates and common environmental pollutants.

### MAINTENANCE

Pressure cleaning of surface contaminants is quickly accomplished with plain water.

### WIND LOAD DISCLAIMER

Fencescreen will not be responsible for fence damage resulting from wind load conditions due to insufficient structural support.

### FEATURES

- UV stabilized to protect against the harmful rays of the sun.
- Industry leading 25-year limited warranty.

*Drawings not to scale.*

#### Detail Name:

4000B Series Double Wall Bottom Lock Fence Slats

#### Drawing Number:

4000B - DOUBLE WALL BOTTOM LOCK SLAT



PHONE: 1.888.313.6313

| [www.FenceScreen.com](http://www.FenceScreen.com)