


411 SERIES


CUSTOM PRINTED SOLID VINYL

Elevation View

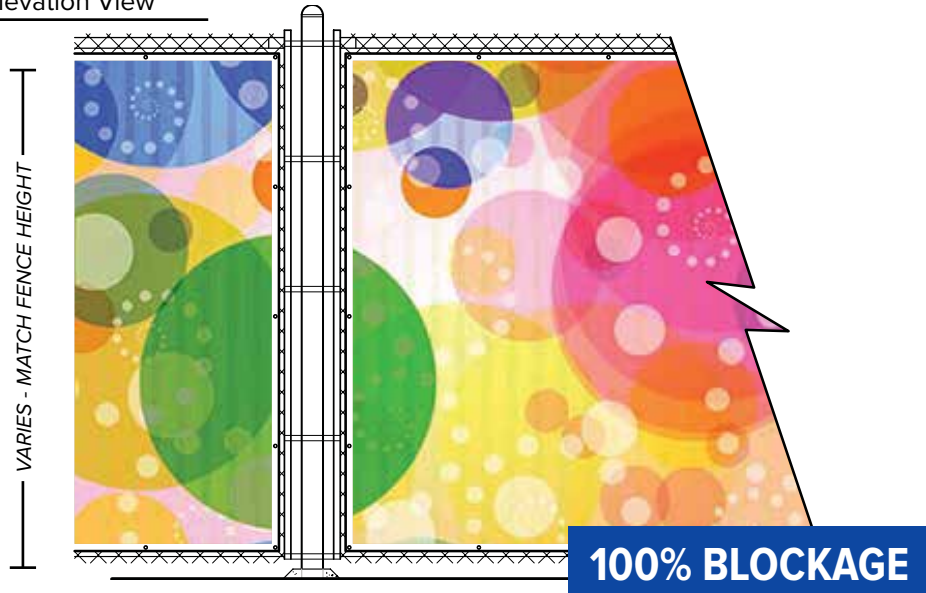

FENCESCREEN PANELS WITH FINISHED EDGE REINFORCEMENT. 3/8" BRASS GROMMETS AT 24" ON CENTER ATTACH TO FENCE WITH FENCESCREEN FASTENERS OR GALVANIZED HOG RINGS.

Attachment Enlargement

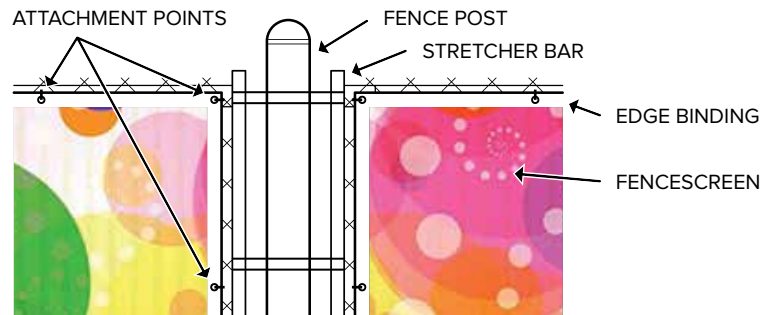

- NOTE:
- INSTALL PER FENCESCREEN MANUFACTURER RECOMMENDATIONS.
 - REFER TO STRUCTURAL PLANS FOR ALL FOOTING SIZES.
 - MATERIAL IS PRINTED ONE SIDE ONLY, NEUTRAL WHITE ON REVERSE.

FENCESCREEN PROPERTIES

PROPERTIES	TEST METHOD	RESULTS
Weight	ASTM D-5041	13 oz/y ²
Warp Tensile	ASTM D-5100	238 lbs.
Warp Tear	ASTM D-2261	132 lbs.
File Tear	ASTM D-5512	126 lbs.
Hydrostatic Resist	ASTM D-5512	375 lbs.
Shade Percentage		100%

MATERIAL COMPOSITION

Custom Printed Solid Vinyl is made from a proprietary Flex Vinyl designed for outdoor ink adhesion and maximum flexibility.

DURABILITY

Solid Vinyl Fence Products are resistant to: severe weather conditions, salt water, sand, road dirt, most acids, alcohol, alkaline, ammonia, petroleum distillates and common environmental pollutants.

MAINTENANCE

Pressure cleaning of surface contaminants is quickly accomplished with plain water.

WIND LOAD DISCLAIMER

Fencescreen will not be responsible for fence damage resulting from wind load conditions due to insufficient structural support.

FEATURES

- UV stabilized to protect against the harmful rays of the sun.
- Available in any custom size.
- Open mesh design allows for maximum airflow.

Available Colors

Custom printed colors to be chosen by customer, process CMYK color range on white base material.



Drawings not to scale.

Detail Name:
411 Series Custom Printed Solid Vinyl

Drawing Number:
411 - flex vinyl custom



PHONE: 1.888.313.6313

| www.FenceScreen.com