


ELEVATION VIEW

FENCESCREEN PANELS WITH 2" FOLDED AND WELDED EDGES FOR REINFORCEMENT.
ATTACH TO FENCE WITH FENCESCREEN ATTACHMENT TIES OR GALV. HOG RINGS.



ATTACHMENT DETAIL 3-D

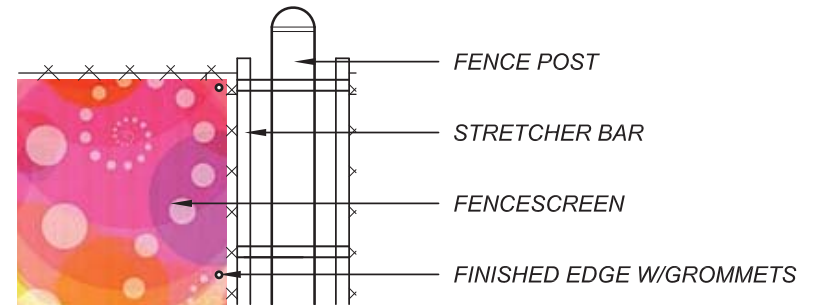

ATTACHMENT ENLARGEMENT

FENCESCREEN SPECIFICATIONS

PROPERTIES	TEST METHOD	RESULTS
WEIGHT	ASTM D-5041	13 (OZ / YD)
WARP TENSILE	ASTM D-5100	238 LBS.
WARP TEAR	ASTM D-2261	132 LBS.
FILE TEAR	ASTM D-5512	126 LBS.
HYDROSTATIC RESIST.	ASTM D-5512	375 LBS.
SHADE PERCENTAGE		100%

NOTE:

- FENCESCREEN PANELS HAVE FINISHED EDGES FOR MAXIMUM STRENGTH. 3/8" GROMMETS @ 24" O.C. ALL 4 SIDES OF MATERIAL.
- INSTALL PER FENCESCREEN MANUFACTURER RECOMMENDATIONS.
- REFER TO CUSTOMER DESIGN FOR COLORS, HEIGHT AND LENGTHS.



AVAILABLE COLORS:

Custom Printed CMYK Color Range on White Base Material

DRAWINGS NOT TO SCALE

DETAIL NAME:

**CUSTOM PRINTED SOLID VINYL
411 SERIES**



DRAWING # **411 CUSTOM VINYL**

PHONE: 1.888.313.6313
WWW.FENCESCREEN.COM