



ELEVATION VIEW

**FENCESCREEN  
500 SERIES  
VINYL COATED  
POLY  
80% BLOCKAGE**

FENCESCREEN PANELS WITH 2" POLYPROPYLENE WEBBING FOR EDGE REINFORCEMENT.  
3/8" BRASS GROMMETS @ 24" O.C.  
ATTACH TO FENCE WITH FENCESCREEN ATTACHMENT TIES OR GALV. HOG RINGS.

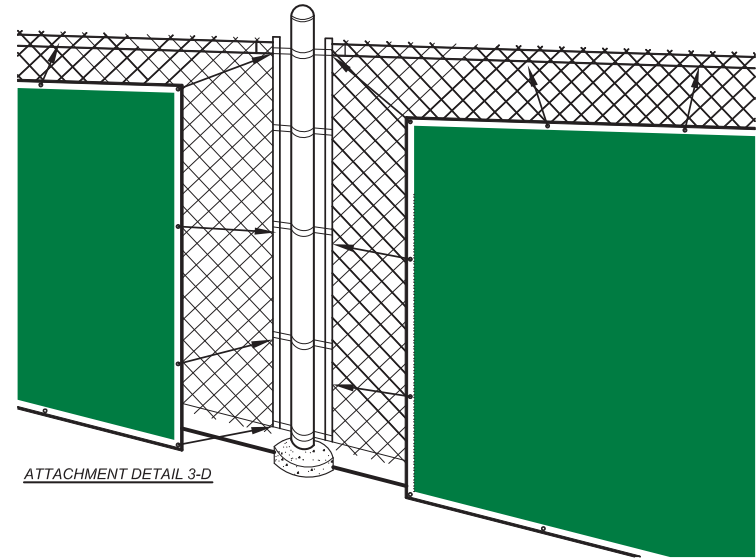

ATTACHMENT DETAIL 3-D

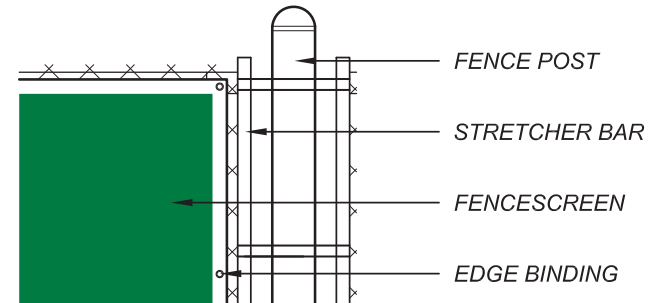

ATTACHMENT ENLARGEMENT

**NOTE:**

1. INSTALL PER FENCESCREEN MANUFACTURER RECOMMENDATIONS.
2. REFER TO STRUCTURAL PLANS FOR ALL FOOTING SIZES.

**AVAILABLE COLORS:**

GREEN, BLACK, RED, ROYAL BLUE



**FENCESCREEN SPECIFICATIONS**

PROPERTIES	TEST METHOD	RESULTS
WEIGHT	ASTM D-5041	8.0 (OZ./YD)
GRAB TENSILE	ASTM D-5100	230/200 LBS.
COLD CRACK	LTC	PASS 40 DEGREES F.
STRIP TENSILE	ASTM 5012	200/140 LBS.
FLAME RESISTANT	MFR	NOT CONSUMED WITHIN 2 MINUTES
SHADE PERCENTAGE		80%

DRAWINGS NOT TO SCALE

DETAIL NAME:

**VINYL COATED POLYESTER  
500 SERIES**



DRAWING # **VINYL COATED POLY 500**

**PHONE: 1.888.313.6313**  
**WWW.FENCESCREEN.COM**