
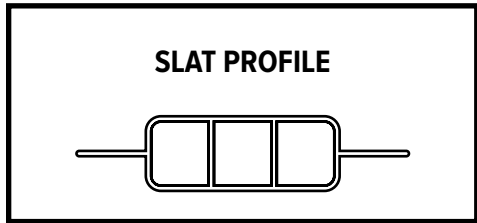


5000 SERIES

SELF LOCKING PRIVACY SLAT

Elevation View

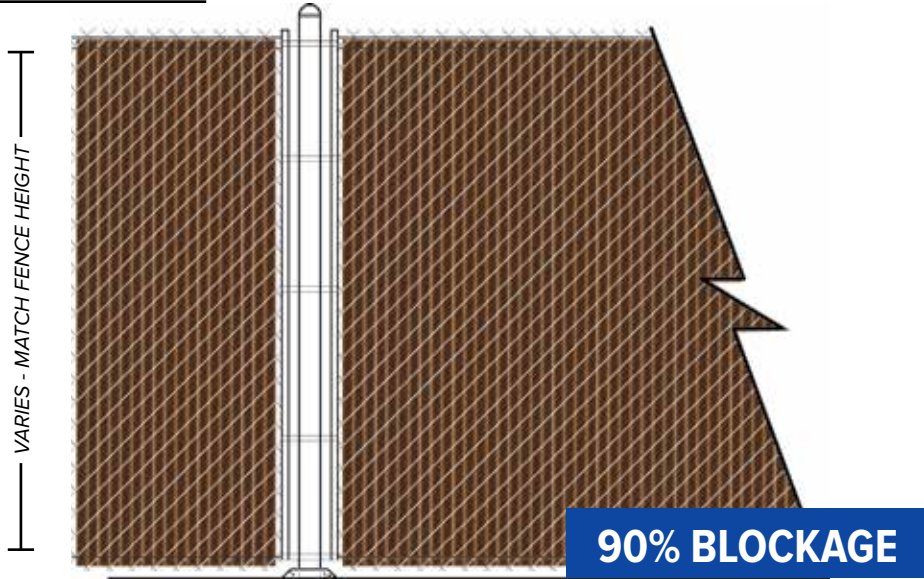

Available Colors


Green, Black, Redwood, Royal Blue, Light Blue, Brown, Gray, Tan, White.



Attachment Enlargement


STEP 1

Insert slats vertically from top to bottom, keeping the locking holes on top.



STEP 2

Thread the flexible locking channel horizontally through the notched holes in the slats



These holes are elliptical to ensure they always stay open for fast and easy threading.



FENCESCREEN PROPERTIES

PROPERTIES	RESULTS
Melt Index	.6
Density	.957
Minimum Temp.	-76° F
Maximum Temp.	250° F
Tensile Strength	3,700 psi
Slat Width	1 ³ / ₃₂ "
Mesh Size	2"
Standard Heights	4, 5, 6, 7, 8, 10 and 12 feet
Wire Gauge	8, 9 or 11
Slats Per Box	82
Average Coverage Per Box	10 linear feet

MATERIAL CONSTRUCTION

Self Locking Privacy Slats are made from extruded High Density Polyethylene (HDPE), color pigments and UV inhibitors.

DURABILITY

HDPE Fence Products are resistant to: severe weather conditions, salt water, sand, road dirt, most acids, alcohol, alkaline, ammonia, petroleum distillates and common environmental pollutants.

MAINTENANCE

Pressure cleaning of surface contaminants is quickly accomplished with plain water.

WIND LOAD DISCLAIMER

Fencescreen will not be responsible for fence damage resulting from wind load conditions due to insufficient structural support.

FEATURES

- UV stabilized to protect against the harmful rays of the sun.
- Industry leading 25-year limited warranty.

Drawings not to scale.

Detail Name:

5000 Series Self Locking Privacy Slat

Drawing Number:

5000 - PRIVACY SLAT



PHONE: 1.888.313.6313

| www.FenceScreen.com