



ELEVATION VIEW

**FENCESCREEN
600 SERIES
OPEN MESH
POLY
78% BLOCKAGE**

FENCESCREEN PANELS WITH 2" POLYPROPELENE WEBBING FOR EDGE REINFORCEMENT.
3/8" BRASS GROMMETS @ 24" O.C.
ATTACH TO FENCE WITH FENCESCREEN ATTACHMENT TIES OR GALV. HOG RINGS.

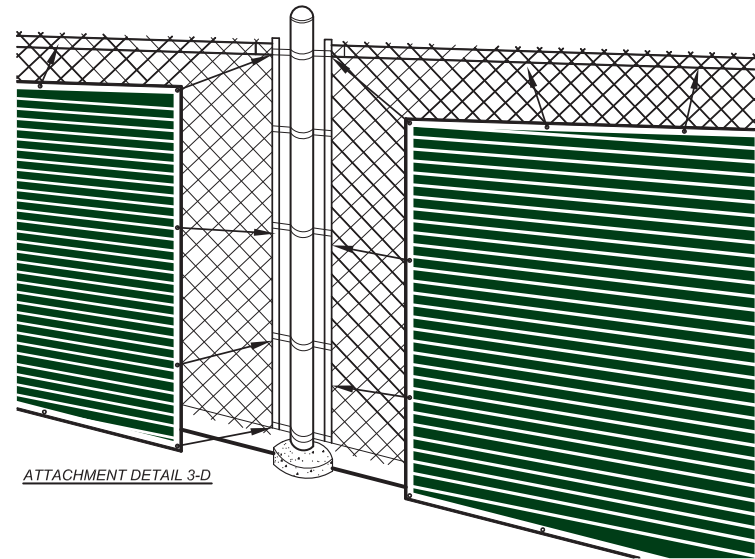

ATTACHMENT DETAIL 3-D

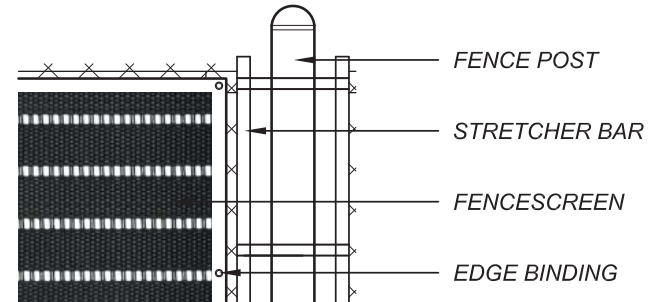

ATTACHMENT ENLARGEMENT

FENCE POST
STRETCHER BAR
FENCESCREEN
EDGE BINDING

NOTE:

1. INSTALL PER FENCESCREEN MANUFACTURER RECOMMENDATIONS.
2. REFER TO STRUCTURAL PLANS FOR ALL FOOTING SIZES.

AVAILABLE COLORS:

BLACK, DARK GREEN, ROYAL BLUE



FENCESCREEN SPECIFICATIONS

PROPERTIES	TEST METHOD	RESULTS
WEIGHT	ASTM D-5041	4.9 (OZ / YD)
WARP TENSILE	ASTM D-5100	75 LBS.
WARP TEAR	ASTM D-2261	120 LBS.
FILL TENSILE	ASTM D-5100	180 LBS.
FILE TEAR	ASTM D-5512	320 LBS.
AIR FLOW	ASTM D-737	300 LBS.
SHADE PERCENTAGE		78%

DRAWINGS NOT TO SCALE

DETAIL NAME:

**OPEN MESH POLYPROPYLENE
600 SERIES**



DRAWING # **OPEN MESH POLY 600**

PHONE: 1.888.313.6313
WWW.FENCESCREEN.COM