



ELEVATION VIEW

**FENCESCREEN
700 SERIES
CLOSED MESH
POLY
95% BLOCKAGE**

FENCESCREEN PANELS WITH 2" POLYPROPELENE WEBBING FOR EDGE REINFORCEMENT.
3/8" BRASS GROMMETS @ 24" O.C.
ATTACH TO FENCE WITH FENCESCREEN ATTACHMENT TIES OR GALV. HOG RINGS.

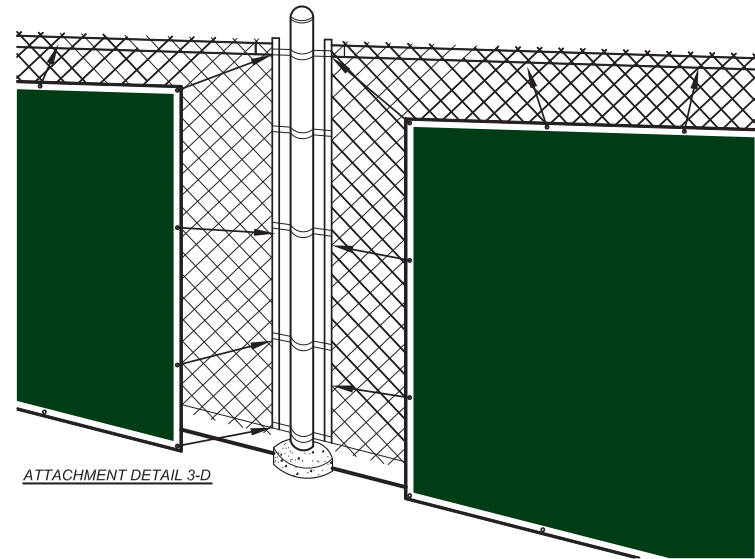

ATTACHMENT DETAIL 3-D

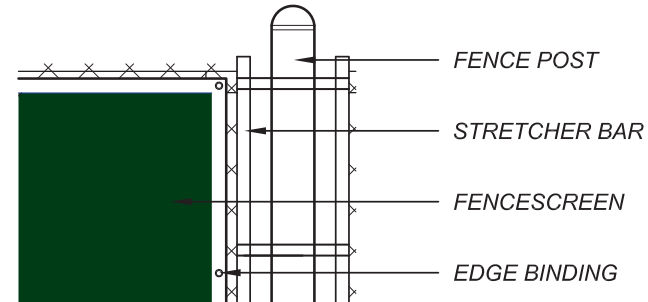

ATTACHMENT ENLARGEMENT

FENCE POST
STRETCHER BAR
FENCESCREEN
EDGE BINDING

NOTE:

1. INSTALL PER FENCESCREEN MANUFACTURER RECOMMENDATIONS.
2. REFER TO STRUCTURAL PLANS FOR ALL FOOTING SIZES.

AVAILABLE COLORS:

BLACK, DARK GREEN



FENCESCREEN SPECIFICATIONS

PROPERTIES	TEST METHOD	RESULTS
WEIGHT	ASTM D-5041	5.6 (OZ / YD)
WARP TENSILE	ASTM D-5100	420 LBS.
WARP TEAR	ASTM D-2261	125 LBS.
FILL TENSILE	ASTM D-5100	225 LBS.
FILE TEAR	ASTM D-5512	90 LBS.
AIR FLOW	ASTM D-737	150 LBS.
SHADE PERCENTAGE		95%

DRAWINGS NOT TO SCALE

DETAIL NAME:

**CLOSED MESH POLYPROPYLENE
700 SERIES**



DRAWING # **CLOSED MESH POLY 700**

PHONE: 1.888.313.6313
WWW.FENCESCREEN.COM