


# 900 SERIES


# BUILDING SCAFFOLDING TARP

Elevation View

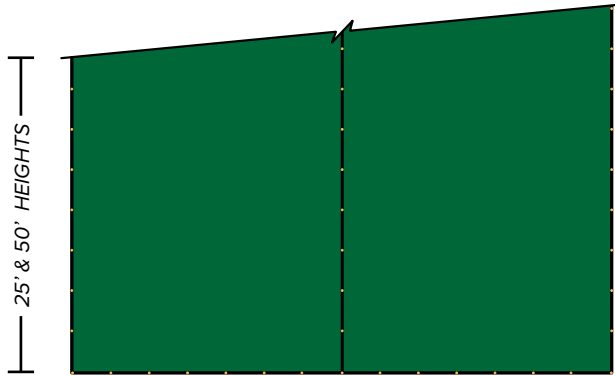

- ADDITIONAL CENTER BINDING FOR SECURE INSTALLATION.
- INDUSTRIAL STRENGTH MESH WITH EDGE FINISH ALL FOUR SIDES.
- 4-PLY HEM GROMMETS AT 24" ON CENTER.
- CENTER LINE TOP OF GROMMETS AT 24" ON CENTER.

25' x 50' Panel Application Example

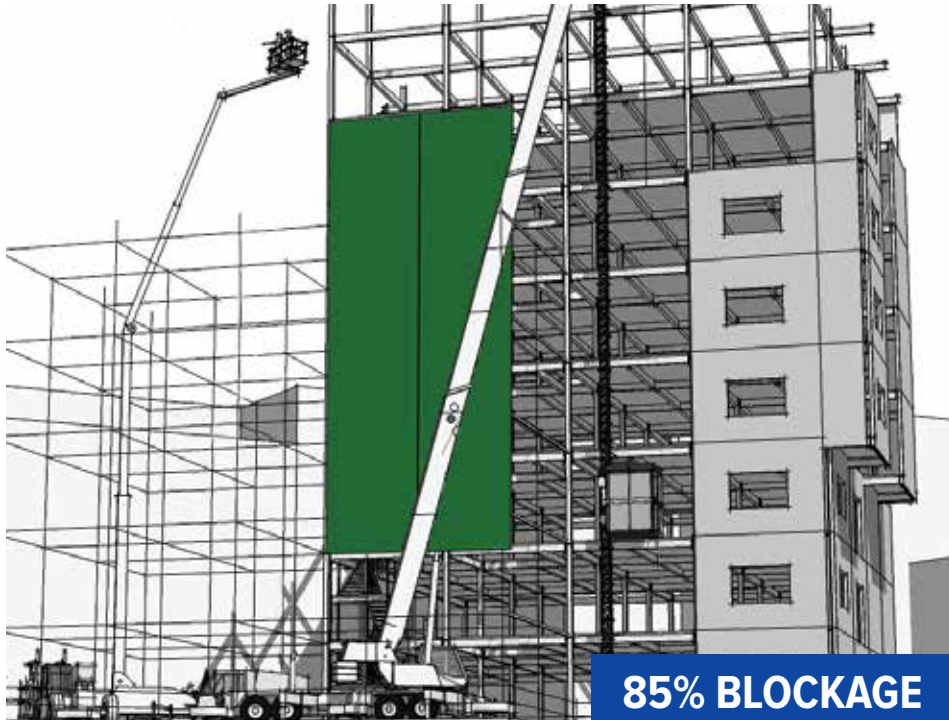

**85% BLOCKAGE**

## FENCESCREEN PROPERTIES

PROPERTIES	TEST METHOD	RESULTS
Weight	ASTM D-5041	145 g/m <sup>2</sup>
Flamability Point		364°F
Material Break Strength		500 lbs./ft.
Crystalline Melt Point		133°C
Shade Percentage		85%

### MATERIAL COMPOSITION

Building Scaffolding Tarp is made from woven high density polypropylene (HDPE).

### DURABILITY

HDPE Fence Products are resistant to: severe weather conditions, salt water, sand, road dirt, most acids, alcohol, alkaline, ammonia, petroleum distillates and common environmental pollutants.

### MAINTENANCE

Pressure cleaning of surface contaminants is quickly accomplished with plain water.

### WIND LOAD DISCLAIMER

Fencescreen will not be responsible for fence damage resulting from wind load conditions due to insufficient structural support.

### FEATURES

- Ultra-strong mesh material with Industrial strength webbing in hem.
- Heavy duty stitching and grommets.
- Offers both protection and shade for workers.
- Keeps debris off neighboring property.

### Available Colors

Dark Green, Black, Tan, Royal Blue



### Standard Sizes

- 50' x 20'
- 25' x 20'
- 50' x 8'

*Drawings not to scale.*

#### Detail Name:

700 Series Closed Mesh Poly

#### Drawing Number:

900 - BUILDING TARP



PHONE: 1.888.313.6313

www.FenceScreen.com