



FENCESCREEN PANELS W/2" POLYPROPYLENE WEBBING FOR EDGE REINFORCEMENT. 3/8" BRACE GROMMETS @ 18" O.C. ATTACH TO FENCE W/9GA. STEEL HOG RINGS

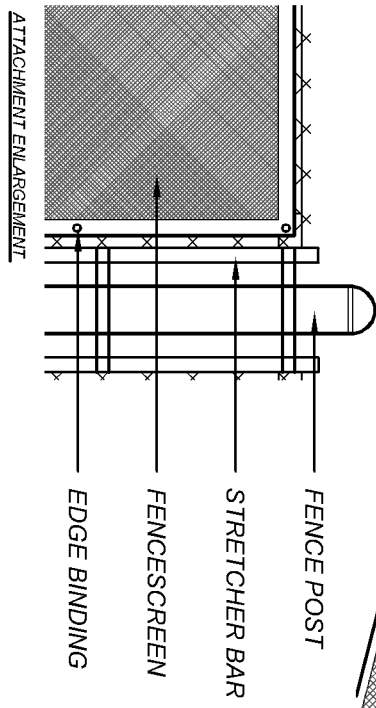

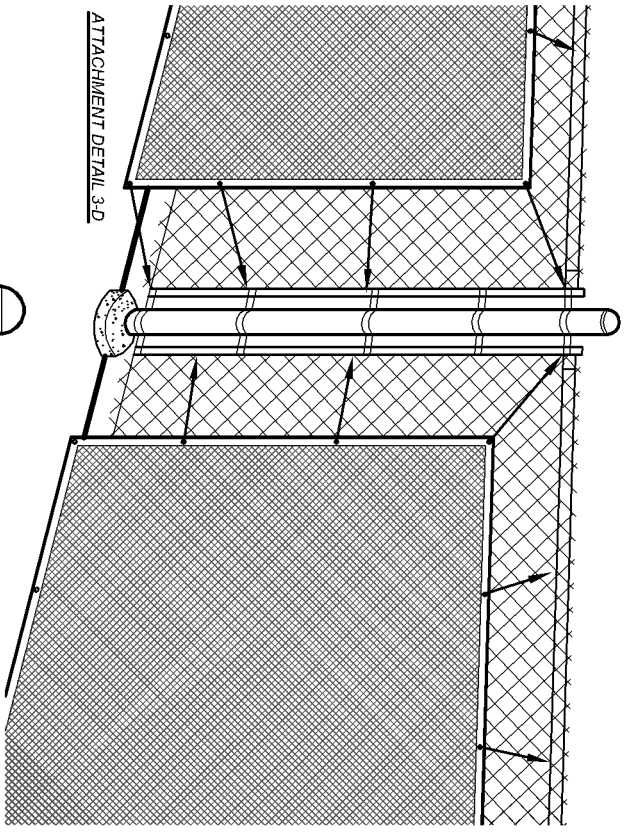

FENCESCREEN SPECIFICATIONS

PROPERTIES	TEST METHOD	RESULTS
WEIGHT	ASTM D-5041	5.6 (OZ./YD)
WARP TENSILE	ASTM D-5100	420 LBS.
WARP TEAR	ASTM D-2261	125 LBS.
FILL TENSILE	ASTM D-5100	225 LBS.
FILL TEAR	ASTM D-5512	90 LBS.
AIR FLOW	ASTM D-737	150 LBS.
SHADE PERCENTAGE		95 %

NOTE:
1. INSTALL PER FENCESCREEN MANUFACTURER RECOMMENDATIONS- #888.313.6313
2. REFER TO STRUCTURAL PLANS FOR ALL FOOTING SIZE

COLOR TO BE PER FENCESCREEN COLORS:

-  GREEN
-  BLACK

NO SCALE

DETAIL NAME:

**CLOSED MESH POLY PROPYLENE-
95% BLOCKAGE**



DRAWING # CP 700

PHONE # 888-313-6313
WWW.FENCESCREEN.COM