
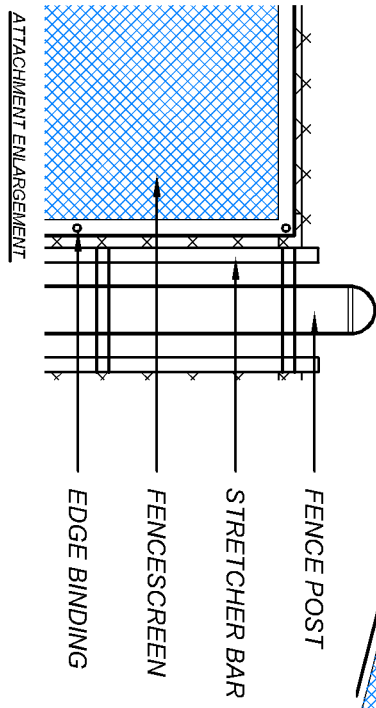


FENCESCREEN PANELS W/2" POLYPROPYLENE WEBBING FOR EDGE REINFORCEMENT. 3/8" BRACE GROMMETS @ 18" O.C. ATTACH TO FENCE W/9GA. STEEL HOG RINGS

FENCESCREEN SPECIFICATIONS

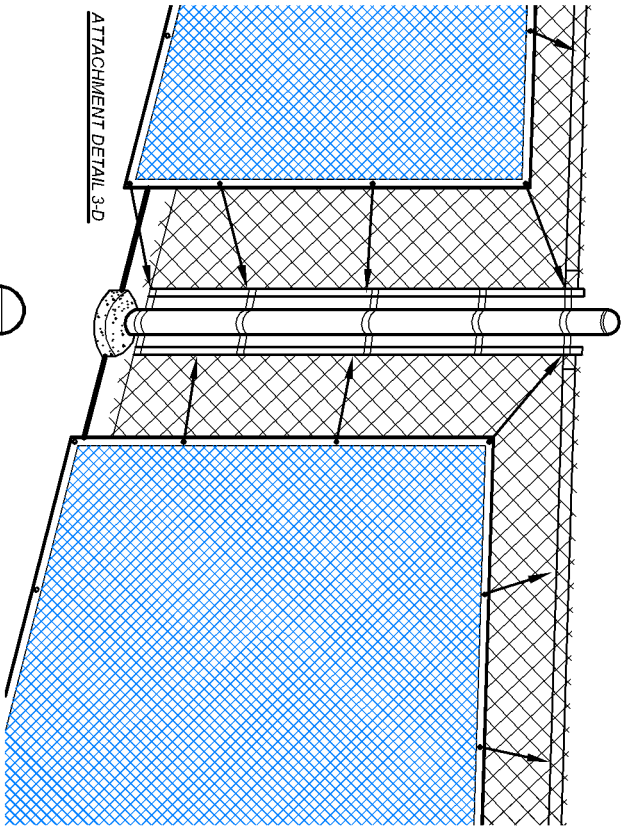


PROPERTIES	TEST METHOD	RESULTS
WEIGHT	ASTM D-5041	4.9 (OZ./YD)
WARP TENSILE	ASTM D-5100	75 LBS.
WARP TEAR	ASTM D-2261	120 LBS.
FILL TENSILE	ASTM D-5100	180 LBS.
FILL TEAR	ASTM D-5512	320 LBS.
AIR FLOW	ASTM D-737	300 LBS.
SHADE PERCENTAGE		85 %

DETAIL NAME:
**OPEN MESH POLYPROPYLENE-
 78% BLOCKAGE**



NOTE:
 1. INSTALL PER FENCESCREEN MANUFACTURER RECOMMENDATIONS- #888.313.6313
 2. REFER TO STRUCTURAL PLANS FOR ALL FOOTING SIZE

COLOR TO BE PER FENCESCREEN COLORS:

 GREEN
  BLACK
  ROYAL BLUE

NO SCALE



DRAWING # PL 600
 PHONE # 888-313-6313
 WWW.FENCESCREEN.COM