
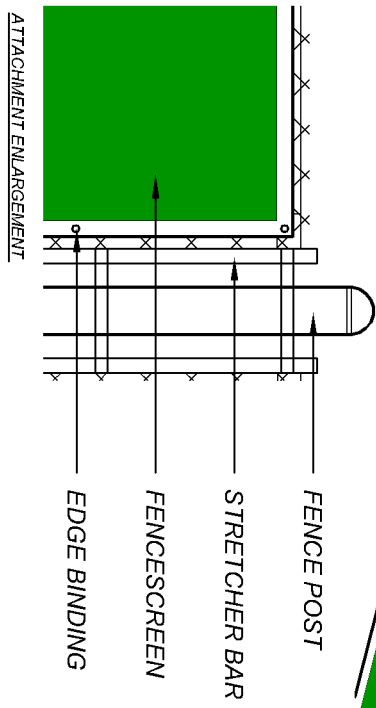


FENCESCREEN PANELS W/2" POLYPROPYLENE WEBBING FOR EDGE REINFORCEMENT. 3/8" BRACE GROMMETS @ 18" O.C. ATTACH TO FENCE W/9GA. STEEL HOG RINGS

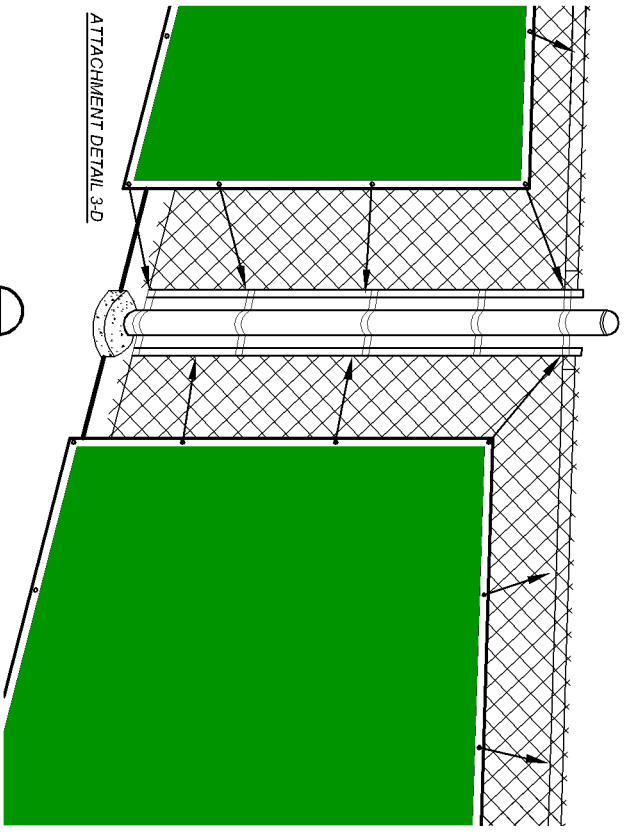

**FENCESCREEN SPECIFICATIONS**

PROPERTIES	TEST METHOD	RESULTS
WEIGHT	ASTM D-5041	13.2 (OZ./YD)
WARP TENSILE	ASTM D-5100	238 LBS.
WARP TEAR	ASTM D-2261	132LBS.
FILL TENSILE	ASTM D-5100	233 LBS.
FILL TEAR	ASTM D-5512	126 LBS.
HYDROSTATIC RESIST.	ASTM D-5512	375 LBS.
SHADE PERCENTAGE		100%

**NOTE:**  
 1. INSTALL PER FENCESCREEN MANUFACTURER RECOMMENDATIONS- #888. 313.6313  
 2. REFER TO STRUCTURAL PLANS FOR ALL FOOTING SIZE

**COLOR TO BE PER FENCESCREEN COLORS:**

GREEN	BLACK	RED	NAVY BLUE	ROYAL BLUE	BROWN	TAN	WHITE

NO SCALE

DETAIL NAME:  
**VINYL FENCESCREEN- 100 % BLOCKAGE**



DRAWING # VL 400  
 PHONE # 888-313-6313  
 WWW.FENCESCREEN.COM