
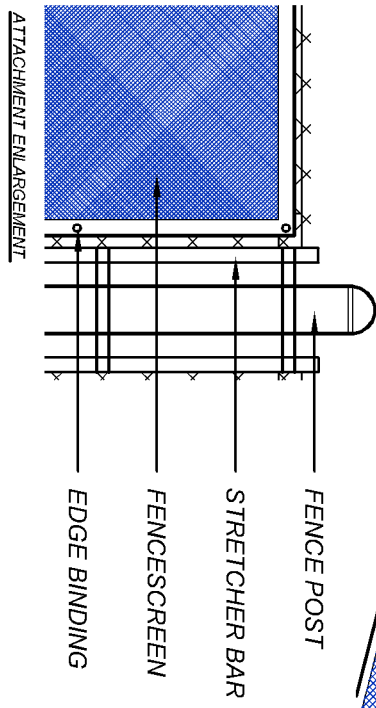


FENCESCREEN PANELS W/2" POLYPROPYLENE WEBBING FOR EDGE REINFORCEMENT. 3/8" BRACE GROMMETS @ 18" O.C. ATTACH TO FENCE W/9GA. STEEL HOG RINGS

FENCESCREEN SPECIFICATIONS

PROPERTIES	TEST METHOD	RESULTS
WEIGHT	ASTM D-5041	8.0 (OZ./YD)
GRAB TENSILE	ASTM D-5100	230/200 LBS.
COLD CRACK	LTC	PASS 40 DEGREES F.
STRIP TENSILE	ASTM 5012	200/140 LBS.
FLAME RESISTANT	MFR	NOT CONSUMED WITHIN 2 MINUTES
SHADE PERCENTAGE		100 %

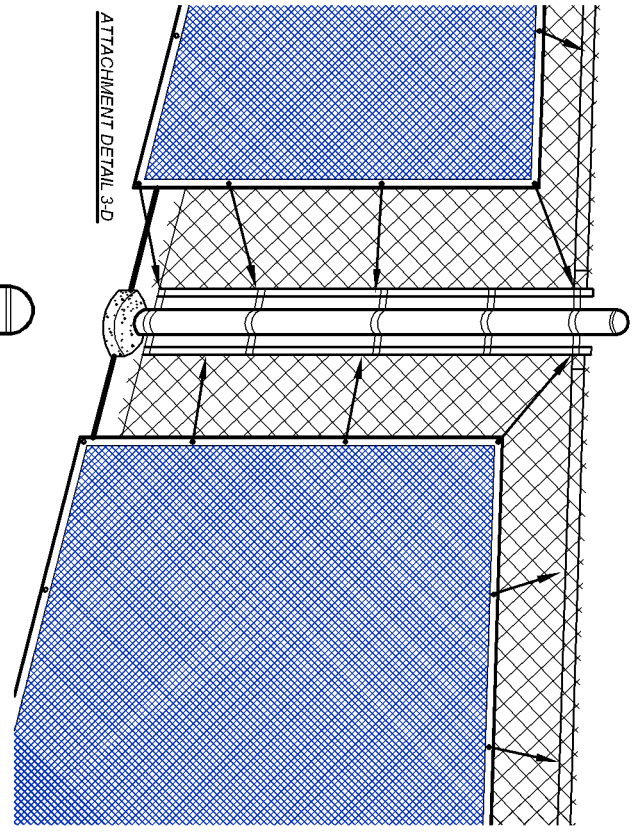

NOTE:
 1. INSTALL PER FENCESCREEN MANUFACTURER RECOMMENDATIONS- #888.313.6313
 2. REFER TO STRUCTURAL PLANS FOR ALL FOOTING SIZE

COLOR TO BE PER FENCESCREEN COLORS:

GREEN	BLACK	NAVY BLUE	ROYAL BLUE	BROWN

NO SCALE

DETAIL NAME:
**VINYL COATED POLYESTER-
 80% BLOCKAGE**



DRAWING # P0500
 PHONE # 888-313-6313
 WWW.FENCESCREEN.COM