
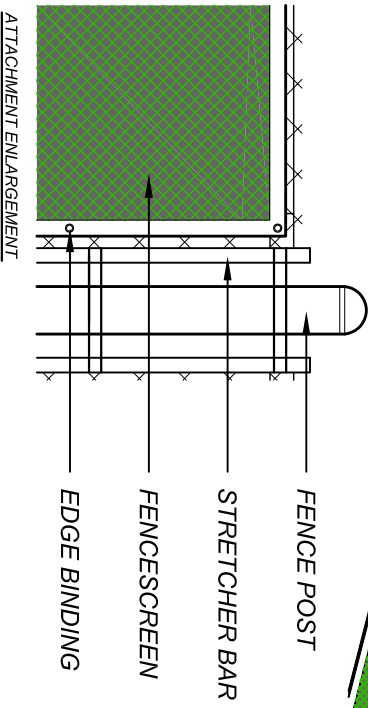


FENCESCREEN PANELS W/2" POLYPROPYLENE WEBBING FOR EDGE REINFORCEMENT. 3/8" BRACE GROMMETS @ 24" O.C. ATTACH TO FENCE W/9GA. STEEL HOG RINGS

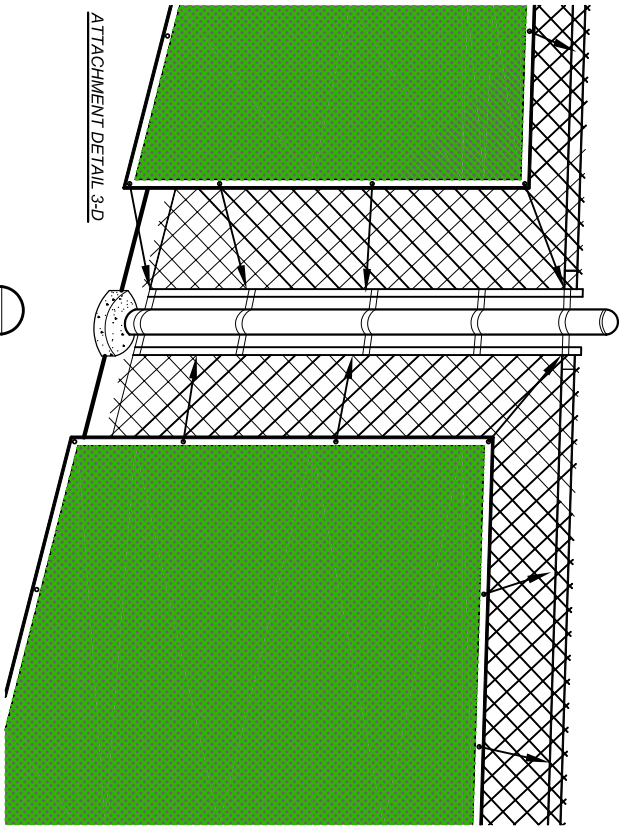


**FENCESCREEN SPECIFICATIONS**

POLYPROPYLENE (PP) WOVEN. UV INHIBITORS	
PROPERTIES	TEST METHOD
WEIGHT	ASTM D-5041
WARP TENSILE	ASTM D-5100
WARP TEAR	ASTM D-2261
FILL TENSILE	ASTM D-5100
FILL TEAR	ASTM D-5512
AIR FLOW	ASTM D-737
SHADE PERCENTAGE	96%

**NOTE:**  
 1. INSTALL PER FENCESCREEN MANUFACTURER RECOMMENDATIONS- #888.313.6313  
 2. REFER TO STRUCTURAL PLANS FOR ALL FOOTING SIZE

**COLOR TO BE PER FENCESCREEN COLORS:**



NO SCALE

DETAIL NAME:

**COMMERCIAL CLOSED POLYPROPYLENE  
 96% BLOCKAGE**



DRAWING # **COMMERCIAL 300**

**PHONE # 888-313-6313  
 WWW.FENCESCREEN.COM**