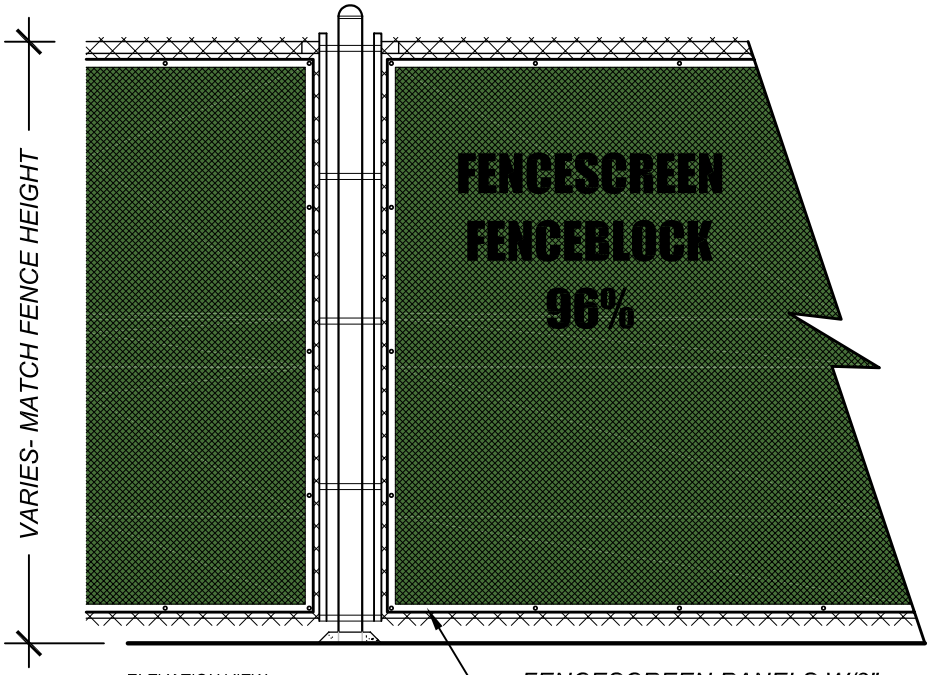

ELEVATION VIEW

FENCESCREEN PANELS W/2" POLYPROPYLENE WEBBING FOR EDGE REINFORCEMENT.
3/8" BRACE GROMMETS @ 24" O.C. ATTACH TO FENCE W/STEEL HOG RINGS OR HEAVY DUTY ZIP TIES.

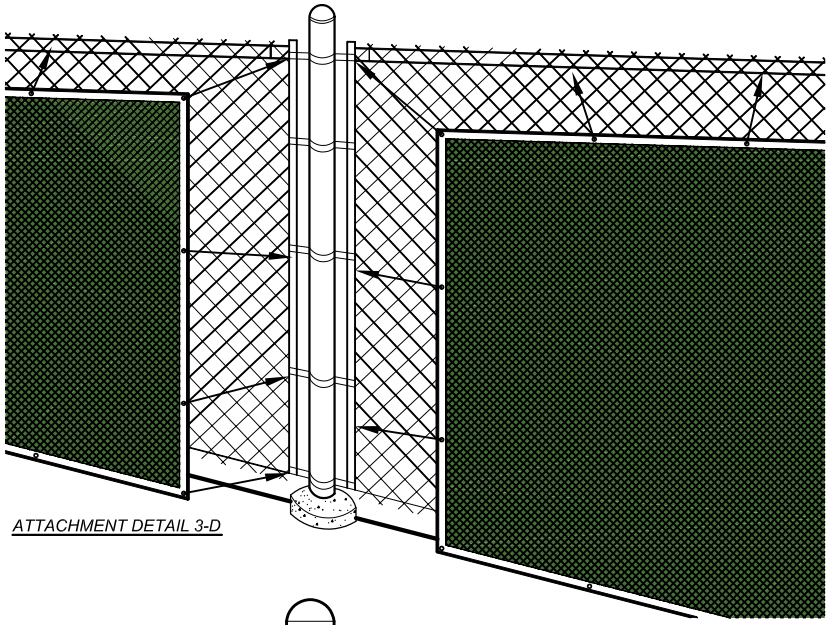

ATTACHMENT DETAIL 3-D

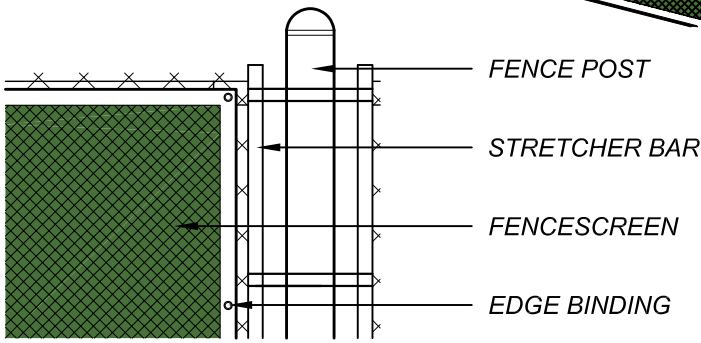

ATTACHMENT ENLARGEMENT

FENCESCREEN SPECIFICATIONS

MATERIAL COMPOSITION: KNITTED (HD) HIGH DENSITY-POLYPROPYLENE

PROPERTIES	TEST METHOD	RESULTS
TEAR STRENGTH	ASTM D-4533	40 LBS.
PUNCTURE STRENGTH	ASTM D-4833	50 LBS.
MULLEN BURST STRENGTH	ASTM D-3786	300 PSI
UV STABILITY @ 500 HOURS	ASTM D-4355	70% RETENTION
SHADE PERCENTAGE		96%

NOTE:
1. INSTALL PER FENCESCREEN MANUFACTURER RECOMMENDATIONS- #888.313.6313
2. REFER TO STRUCTURAL PLANS FOR ALL FOOTING SIZE

COLOR TO BE PER FENCESCREEN COLORS:

DARK GREEN BLACK

NO SCALE

DETAIL NAME:

FENCE BLOCK- 96% BLOCKAGE

DRAWING # FB 100

PHONE # 888-313-6313
WWW.FENCESCREEN.COM