



ELEVATION VIEW

FENCESCREEN PANELS WITH 1" FOLDED AND WELDED EDGES FOR REINFORCEMENT.
ATTACH TO FENCE WITH FENCESCREEN ATTACHMENT TIES OR GALV. HOG RINGS.

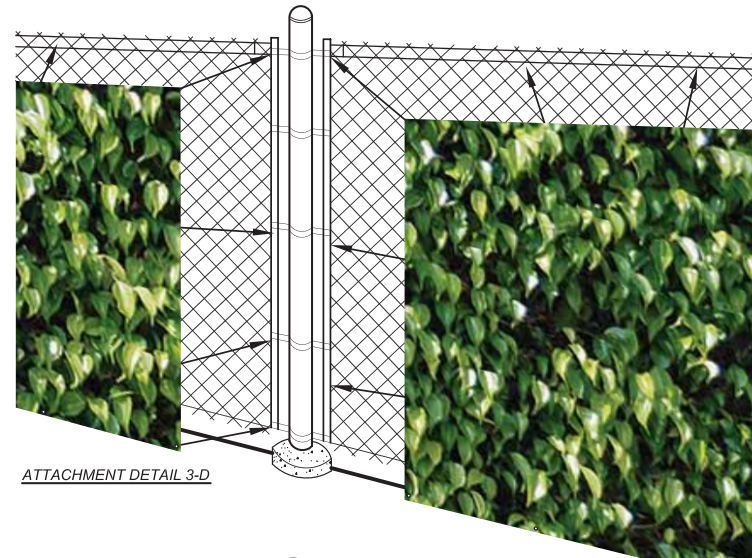

ATTACHMENT DETAIL 3-D

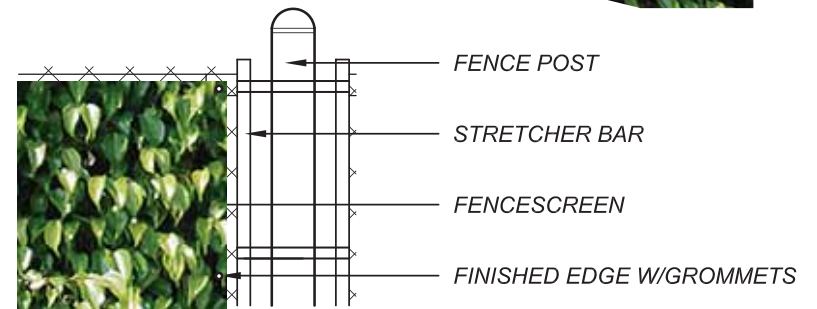

ATTACHMENT ENLARGEMENT

FENCESCREEN SPECIFICATIONS

MATERIAL COMPOSITION: PVC/POLYESTER

| PROPERTIES | TEST METHOD | RESULTS |
|--------------------------------|----------------|-------------------------|
| BREAKING STRENGTH | ASTM D757 GRAB | 160W X 120F |
| WEIGHT | | 8.0 OZ. YD ² |
| 1" STRIP TENSIL STRENGTH (LBS) | ASTM D751B | 100W X 55F |
| PUNCTURE RESISTANT (LBS) | ASTM D751 | 230 |
| FLAME RESISTANT | NFPA-701 | AF=2 SEC, CHORE 17 ID |
| INK ADHESION | | EXCELLENT |
| SHADE PERCENTAGE | | 75% |

NOTE:

1. FENCESCREEN PANELS HAVE FINISHED EDGES FOR MAXIMUM STRENGTH. 3/8" GROMMETS @ 24" O.C. ALL 4 SIDES OF MATERIAL.
2. INSTALL PER FENCESCREEN MANUFACTURER RECOMMENDATIONS.
3. REFER TO CUSTOMER DESIGN FOR COLORS, HEIGHT AND LENGTHS.
4. MATERIAL IS PRINTED ONE SIDE ONLY, NEUTRAL WHITE ON REVERSE.



Printed in Process CMYK Color Range on White Base Material

DRAWINGS NOT TO SCALE

DETAIL NAME:

FICUS DESIGN
211 SERIES PRINTED FLEX MESH



DRAWING # **211 FICUS**

PHONE: 1.888.313.6313
WWW.FENCESCREEN.COM