


500 SERIES


VINYL COATED POLY

Elevation View

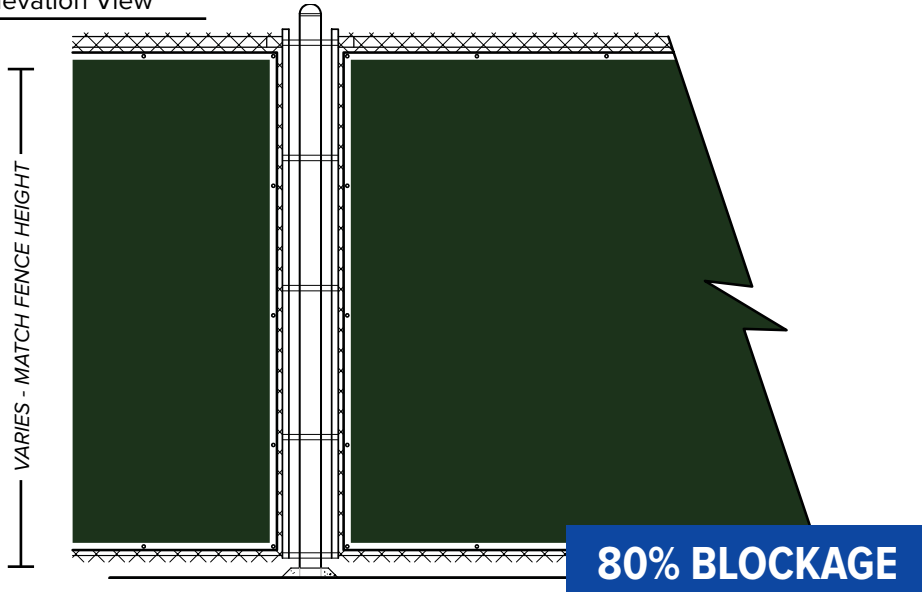

FENCESCREEN PANELS WITH 2" POLYPROPYLENE WEBBING FOR EDGE REINFORCEMENT. 3/8" BRASS GROMMETS AT 24" ON CENTER ATTACH TO FENCE WITH FENCESCREEN FASTENERS OR GALVANIZED HOG RINGS.

Attachment Enlargement

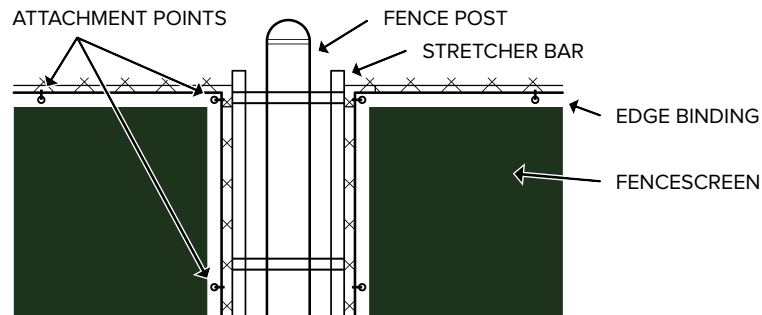

- NOTE:
- INSTALL PER FENCESCREEN MANUFACTURER RECOMMENDATIONS.
 - REFER TO STRUCTURAL PLANS FOR ALL FOOTING SIZES.
 - MATERIAL IS PRINTED ONE SIDE ONLY, NEUTRAL WHITE ON REVERSE.

FENCESCREEN PROPERTIES

PROPERTIES	TEST METHOD	RESULTS
Weight	ASTM D-5041	8 oz/y ²
Grab Tensile	ASTM D-5100	230/200 lbs.
Cold Crack	LTC	Pass 40° F
Strip Tensile	ASTM D-5012	200/140 lbs.
Flame Resistance	MFR	Not consumed within 2 min.
Shade Percentage		80%

MATERIAL COMPOSITION

Vinyl Coated Poly is made from PVC Polyester with a proprietary Fencescreen formula.

DURABILITY

Solid Vinyl Fence Products are resistant to: severe weather conditions, salt water, sand, road dirt, most acids, alcohol, alkaline, ammonia, petroleum distillates and common environmental pollutants.

MAINTENANCE

Pressure cleaning of surface contaminants is quickly accomplished with plain water.

WIND LOAD DISCLAIMER

Fencescreen will not be responsible for fence damage resulting from wind load conditions due to insufficient structural support.

FEATURES

- UV stabilized to protect against the harmful rays of the sun.
- Available in any custom size.
- Industry leading 3-year limited warranty.

Available Colors

Dark Green, Black, Red, Blue.



Drawings not to scale.

Detail Name:
500 Series Vinyl Coated Poly

Drawing Number:
VC500 - VCP



PHONE: 1.888.313.6313

| www.FenceScreen.com