


600 SERIES


OPEN MESH POLY

Elevation View

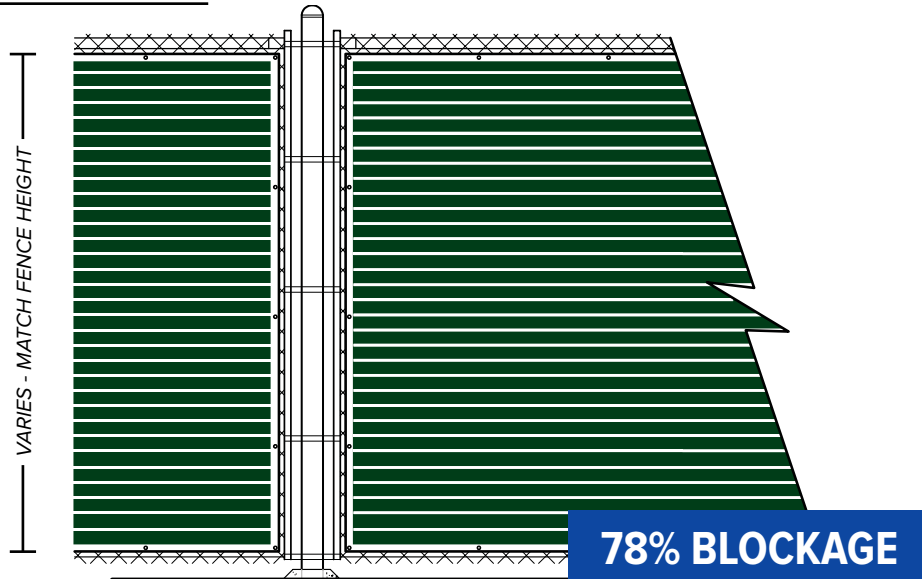

FENCESCREEN PANELS WITH 2" POLYPROPYLENE WEBBING FOR EDGE REINFORCEMENT. 3/8" BRASS GROMMETS AT 24" ON CENTER ATTACH TO FENCE WITH FENCESCREEN TIES OR GALVANIZED HOG RINGS.

Attachment Enlargement

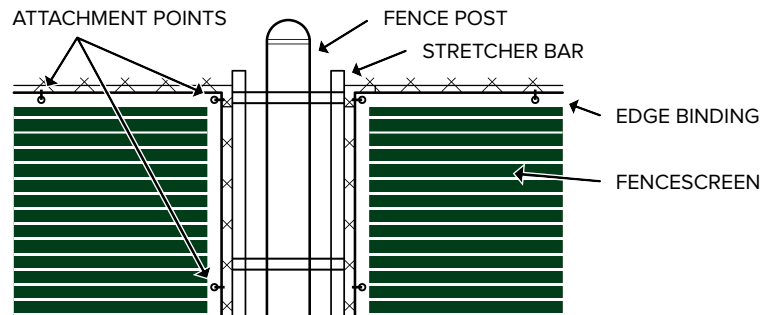

NOTE:
 • INSTALL PER FENCESCREEN MANUFACTURER RECOMMENDATIONS.
 • REFER TO STRUCTURAL PLANS FOR ALL FOOTING SIZES.

FENCESCREEN PROPERTIES

PROPERTIES	TEST METHOD	RESULTS
Weight	ASTM D-5261	4.9 oz/y ²
Warp Tensile	ASTM D-5100	75 lbs.
Warp Tear	ASTM D-2261	120 lbs.
Fill Tensile	ASTM D-5100	180 lbs.
File Tear	ASTM D-5512	320 lbs.
Air Flow	ASTM D-737	22%
Melting Temperature		335° F
Shade Percentage		78%

MATERIAL COMPOSITION

Open Mesh Poly is made from polypropylene monofilament.

DURABILITY

Knitted Polypropylene Fence Products are resistant to: severe weather conditions, salt water, sand, road dirt, most acids, alcohol, alkaline, ammonia, petroleum distillates and common environmental pollutants.

MAINTENANCE

Pressure cleaning of surface contaminants is quickly accomplished with plain water.

WIND LOAD DISCLAIMER

Fencescreen will not be responsible for fence damage resulting from wind load conditions due to insufficient structural support.

FEATURES

- UV stabilized to protect against the harmful rays of the sun.
- Maximum airflow
- Available in any custom size.
- Industry leading 3-year limited warranty.

Available Colors

Dark Green, Black, Royal Blue



Drawings not to scale.

Detail Name:
600 Series Open Mesh Poly

Drawing Number:
OP600 - OPEN MESH POLY



PHONE: 1.888.313.6313

| www.FenceScreen.com