


ELEVATION VIEW

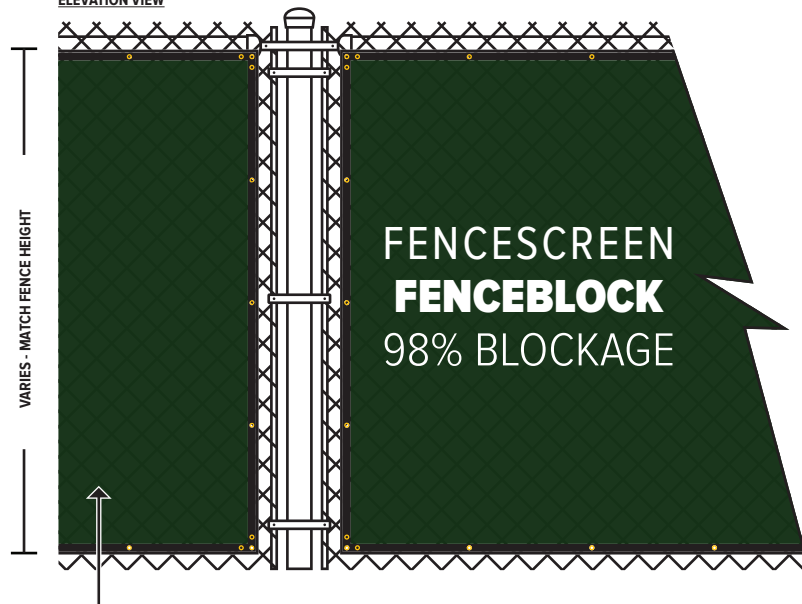


- FENCESCREEN PANELS WITH 2" POLYPROPYLENE WEBBING FOR EDGE REINFORCEMENT.
- 3/8" BRASS GROMMETS AT 24" ON CENTER ATTACH TO FENCE WITH FENCESCREEN FASTENERS OR GALVANIZED HOG RINGS.

FENCESCREEN MATERIAL SPECIFICATIONS


MATERIAL COMPOSITION: WOVEN HIGH DENSITY POLYETHYLENE

PROPERTIES	RESULTS
Construction (tapes/inch)	Warp: 20 Weft: 10
Tenacity (lb/inch)	Warp: > 60 Weft: > 90
Material Weight	135 g/m ²
U.V. Resistance (70% Tenacity Retained After 200 Hours)	Warp: 85 Weft: 85
Water Permeability	4.2 gallons/yd ² /second
Shade / Wind Blockage	98%

ATTACHMENT DETAIL 3D

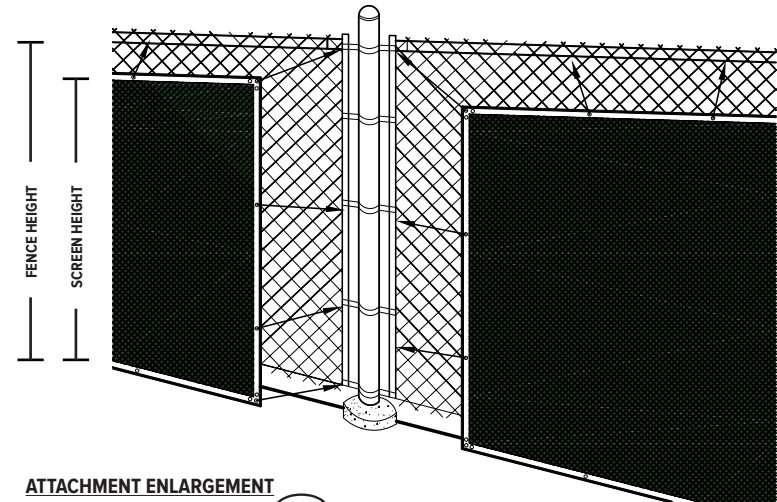

ATTACHMENT ENLARGEMENT

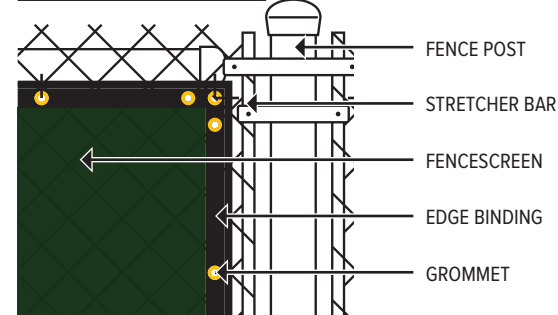

NOTE:

- INSTALL PER FENCESCREEN MANUFACTURER RECOMMENDATION
- REFER TO STRUCTURAL PLANS FOR ALL FOOTING SIZE

AVAILABLE COLORS:



**100
SERIES**

FENCEBLOCK



DRAWING #

PS100 FenceBlock

888-313-6313

WWW.FENCESCREEN.COM