


SOUNDBLOCK ROLL PRODUCT



MATERIAL CLOSE UP - FRONT - SMOOTH SIDE



MATERIAL CLOSE UP - BACK - TEXTURED SIDE

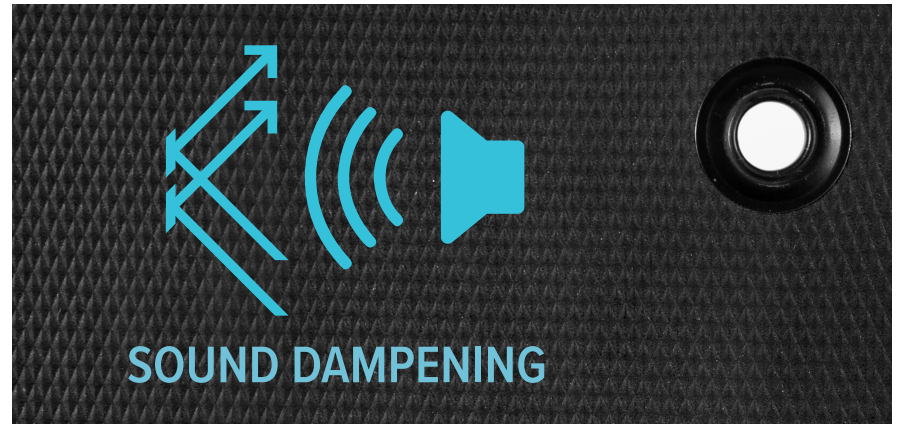

FENCESCREEN MATERIAL SPECIFICATIONS

MATERIAL COMPOSITION: PROPRIETARY COMPOSITION W/ HIGH UV-RESISTANCE

PROPERTIES	RESULTS
Length	96"
Width	48"
Material Thickness	1/8"
Tensile Strength	Min. 510 PSI
Acoustical Rating	Minumum STC 32 per ISO 16283 (part III) - 1981 DIN: 52210 & ISO 140 (part III)
Minumum Sound Attenuation	24 DBA @ 100Hz/16 DBA @ 40Hz
Heat Tolerance	200° Fahrenheit (93° Celsius) for 7 Days
Freezing Point	-40° Fahrenheit (-40° Celsius)
Visibility Blockage	100%

AVAILABLE COLORS:



BLACK

**850
SERIES**

SOUNDBLOCK



DRAWING # 850SERIES-SOUNDBLOCK

888-313-6313
WWW.FENCESCREEN.COM