


ELEVATION VIEW

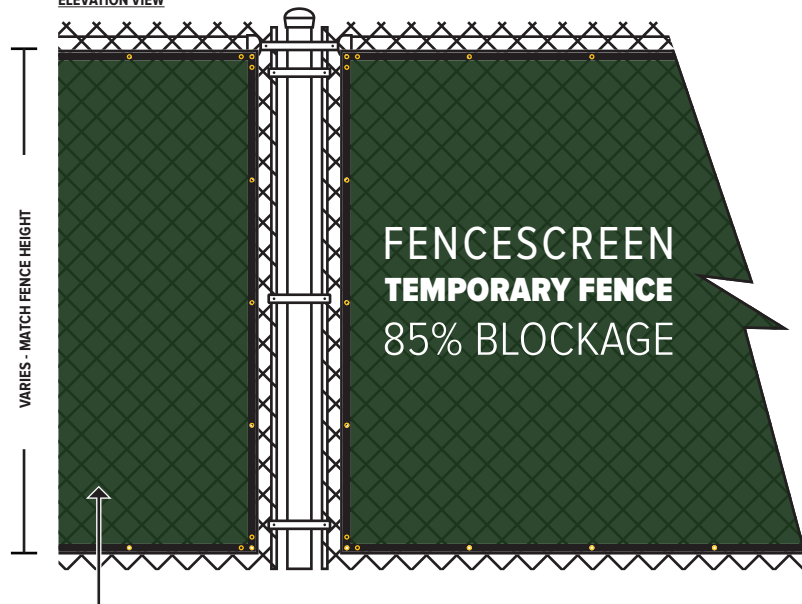


- FENCESCREEN PANELS WITH 2" POLYPROPYLENE WEBBING FOR EDGE REINFORCEMENT.
- 3/8" BRASS GROMMETS AT 24" ON CENTER ATTACH TO FENCE WITH FENCESCREEN FASTENERS OR GALVANIZED HOG RINGS.

FENCESCREEN MATERIAL SPECIFICATIONS


MATERIAL COMPOSITION: KNITTED HIGH DENSITY POLYETHYLENE (HDPE)

PROPERTIES	RESULTS
Weight	100 g/m ²
Material Break Strength	420 lbs/ft
Crystalline Melt Point	133°C
Flamability Point	364°C
Shade Percentage	85%

ATTACHMENT DETAIL 3D

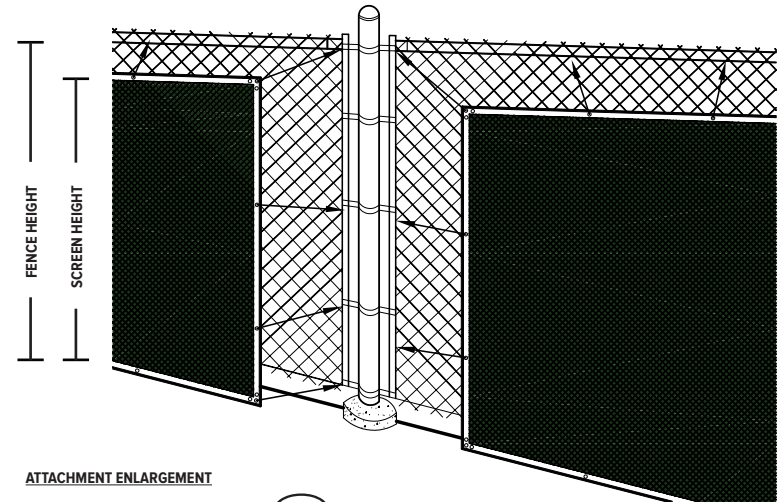

ATTACHMENT ENLARGEMENT

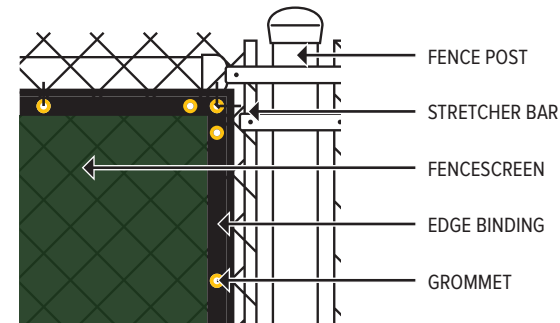

AVAILABLE FABRIC COLORS FOR PRINT (USING CMYK COLOR INK):



**130
SERIES**

**TEMPORARY
FENCE SCREEN**



DRAWING #

PS130TFS

888-313-6313

WWW.FENCESCREEN.COM