


ELEVATION VIEW

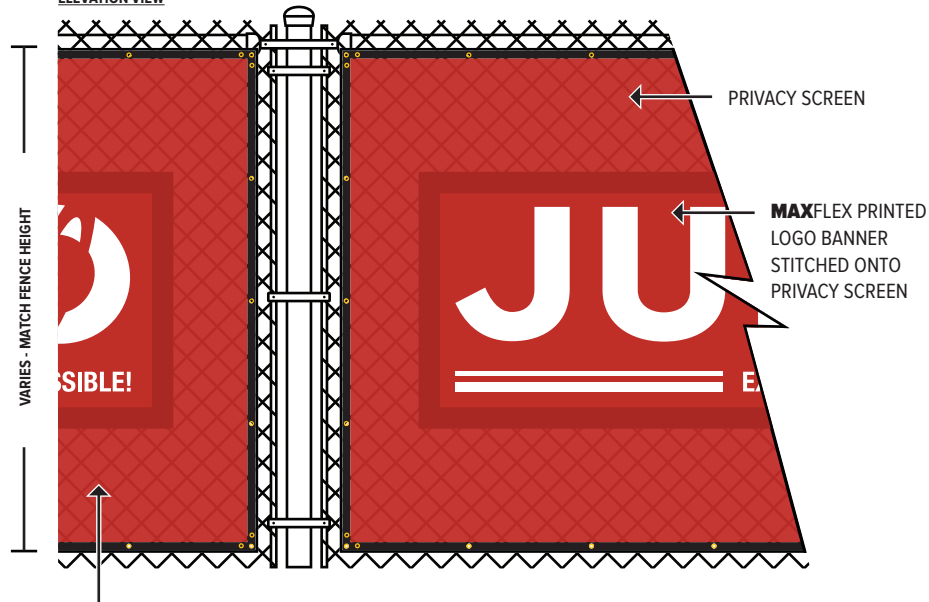


- FENCESCREEN PANELS WELDED FINISH EDGES FOR REINFORCEMENT
- #2 MILITARY GRADE BRASS GROMMETS, SPACED 24" ON ALL SIDES

FENCESCREEN MATERIAL SPECIFICATIONS


MATERIAL COMPOSITION: KNITTED HIGH DENSITY POLYETHYLENE (HDPE)

PROPERTIES	RESULTS
Filament Strength	50 lbs. per ft.
Material Break Strength	500 lbs. per ft.
Material Weight	175 g/m ²
Crystalline Melt Point	133° C
Composition of UV Inhibitor	1.5% Amplas CM111821 / 1.5% Equaster CM
Flamability Point	364° C
Shade / Wind Blockage	90%

ATTACHMENT DETAIL 3D

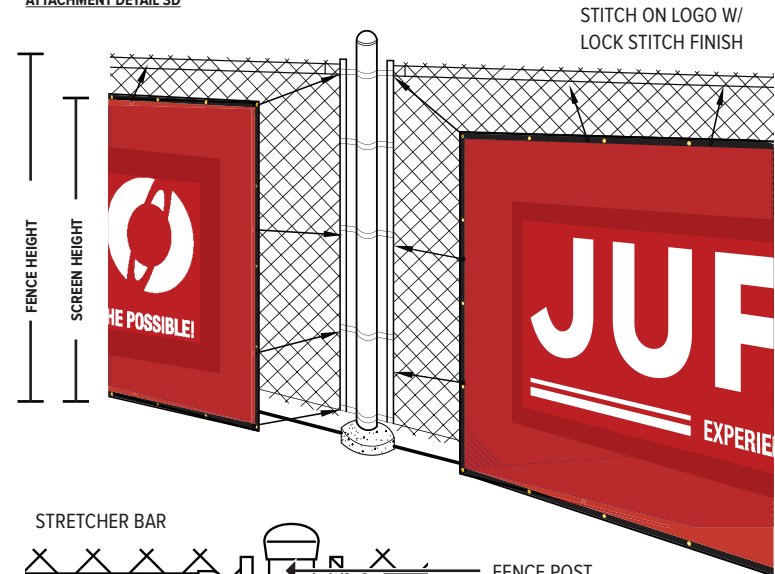

STRETCHER BAR

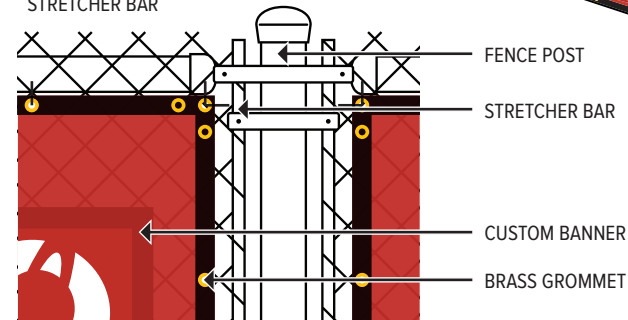

NOTE:

- INSTALL PER FENCESCREEN MANUFACTURER RECOMMENDATION

AVAILABLE FABRIC COLORS PRIVACY SCREEN (USING CMYK COLOR INK):



**112
SERIES**

**BUILDER LOGO ON
PRIVACY PLUS SCREEN**



DRAWING #

PS112-STITCHON

888-313-6313

WWW.FENCESCREEN.COM