


ELEVATION VIEW

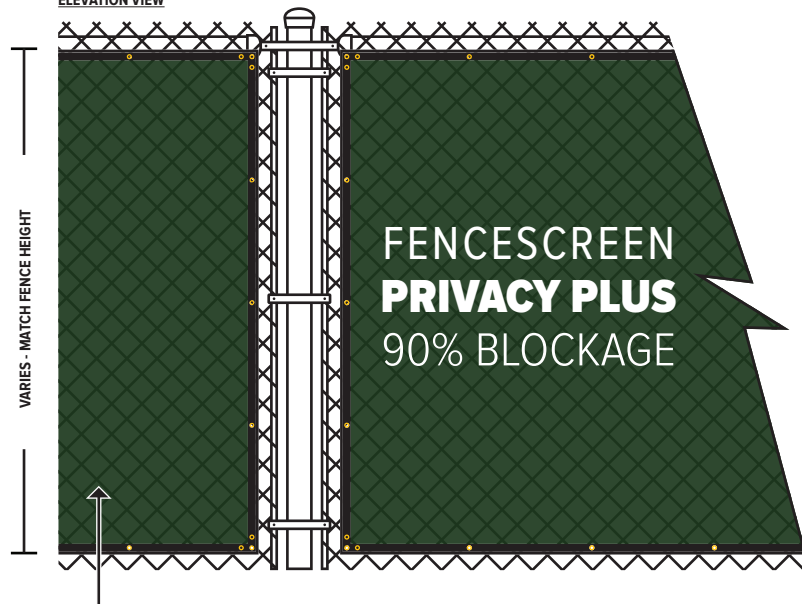


- FENCESCREEN PANELS WITH 2" POLYPROPYLENE WEBBING FOR EDGE REINFORCEMENT.
- 3/8" BRASS GROMMETS AT 24" ON CENTER ATTACH TO FENCE WITH FENCESCREEN FASTENERS OR GALVANIZED HOG RINGS.

FENCESCREEN MATERIAL SPECIFICATIONS


MATERIAL COMPOSITION: KNITTED HIGH DENSITY POLYETHYLENE (HDPE)

PROPERTIES	RESULTS
Filament Strength	50 lbs. per ft.
Material Break Strength	500 lbs. per ft.
Material Weight	175 g/m ²
Crystalline Melt Point	133° C
Composition of UV Inhibitor	1.5% Amplas CM111821 / 1.5% Equaster CM 106000
Flamability Point	364° C
Shade / Wind Blockage	90%

ATTACHMENT DETAIL 3D

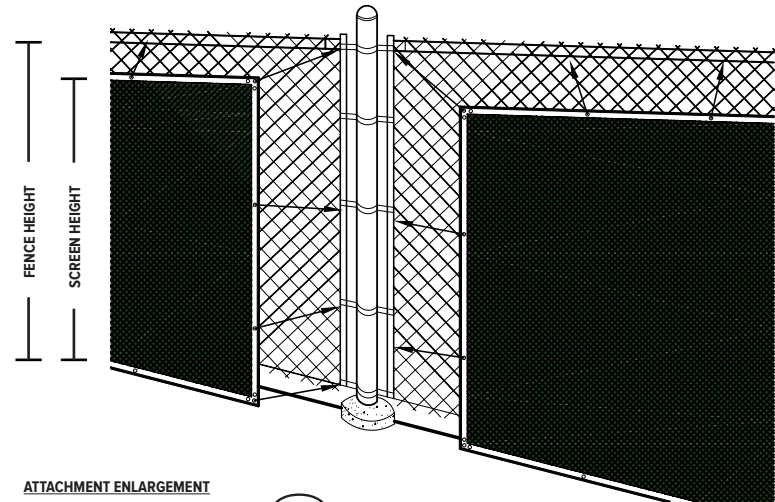

ATTACHMENT ENLARGEMENT

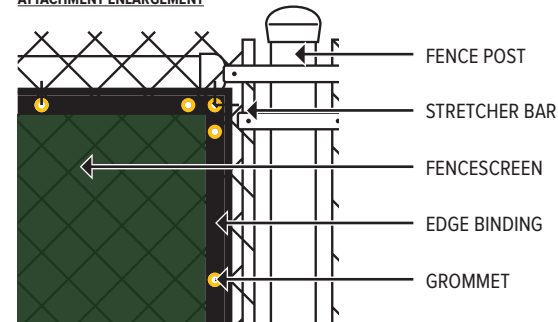

NOTE:

- INSTALL PER FENCESCREEN MANUFACTURER RECOMMENDATION
- REFER TO STRUCTURAL PLANS FOR ALL FOOTING SIZE

AVAILABLE COLORS:



**200
SERIES**

**PRIVACY PLUS
SCREEN**



DRAWING #

PS200 Privacy Plus

888-313-6313

WWW.FENCESCREEN.COM