
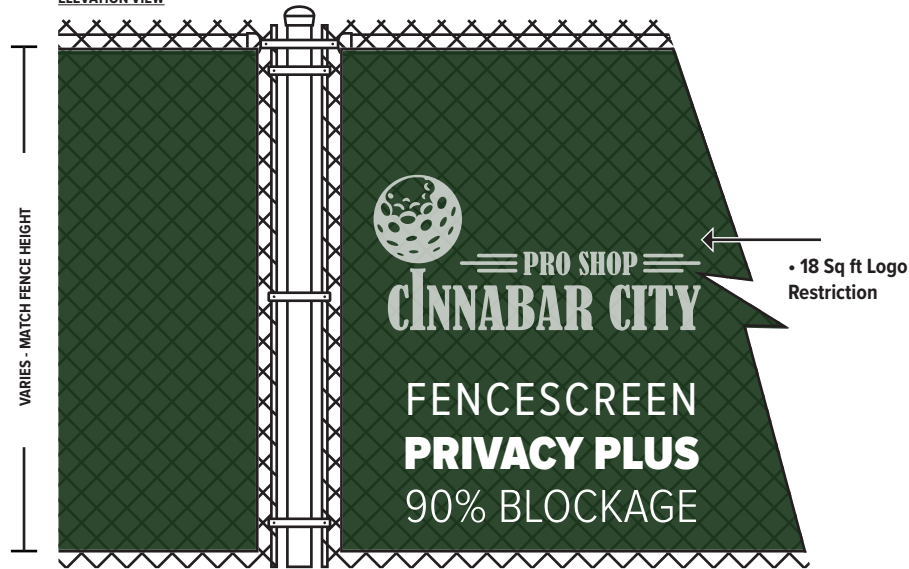


ELEVATION VIEW

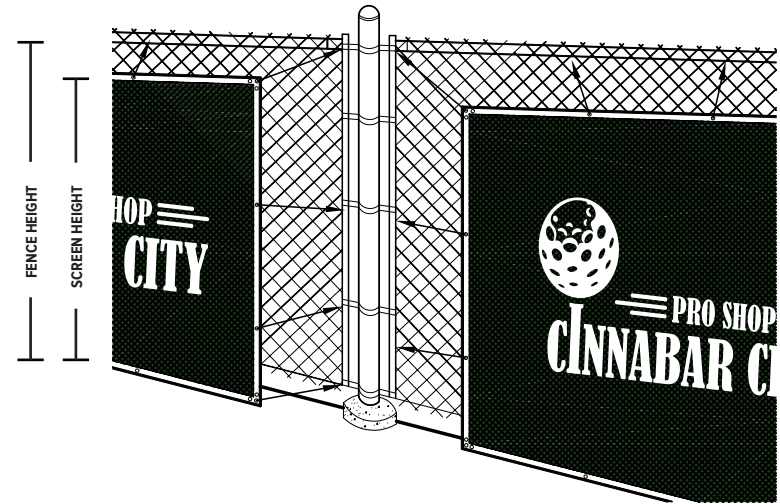

ATTACHMENT DETAIL 3D

**NOTE:**

- DIRECT-TO FABRIC DIGITAL PRINTING (PRINTED ONLY ON ONE SIDE)
- **VECTOR ARTWORK ONLY.** WE DO NOT RECOMMEND PHOTOGRAPHS AND GRADIENTS

FENCESCREEN MATERIAL SPECIFICATIONS**MATERIAL COMPOSITION:** KNITTED HIGH DENSITY POLYETHYLENE (HDPE)

PROPERTIES	RESULTS
Filament Strength	50 lbs. per ft.
Material Break Strength	500 lbs. per ft.
Material Weight	175 g/m ²
Crystalline Melt Point	133° C
Composition of UV Inhibitor	1.5% Amplas CM111821 / 1.5% Equaster CM 106000
Flamability Point	364° C
Shade / Wind Blockage	90%

AVAILABLE LENGTHS:

50' **100'** **150'** **200'**
 LINEAR FEET LINEAR FEET LINEAR FEET LINEAR FEET

AVAILABLE HEIGHTS:

6' **8'**

AVAILABLE COLORS:

**150
SERIES**

**BASIC LOGO
SCREEN**



DRAWING #

P0150

888-313-6313
WWW.FENCESCREEN.COM