


112 SERIES


STITCH ON LOGO ON PRIVACY PLUS

Elevation View

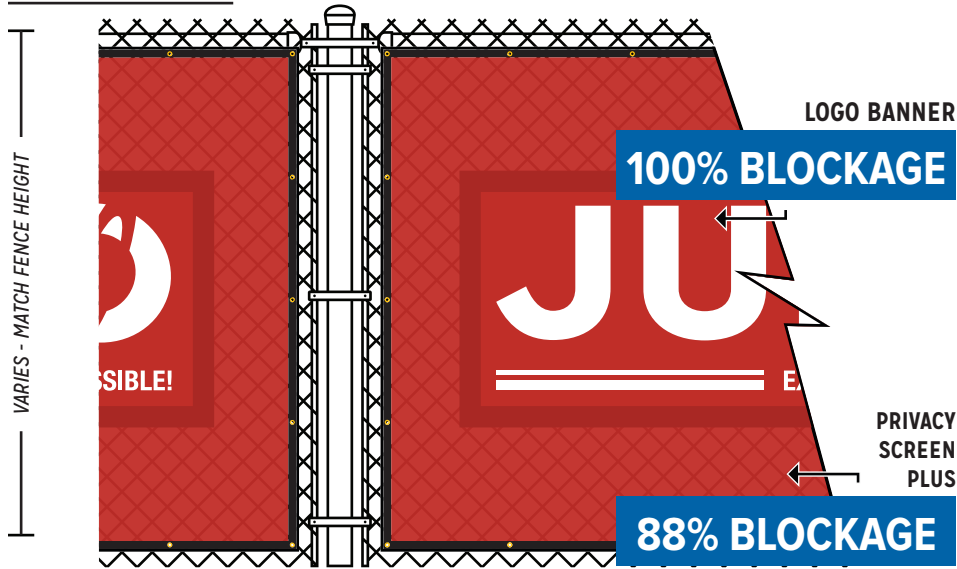

- FENCESCREEN PANELS WITH 2" POLYPROPYLENE WEBBING FOR EDGE REINFORCEMENT.
- 3/8" BRASS GROMMETS AT 24" ON CENTER ATTACH TO FENCE WITH FENCESCREEN FASTENERS OR GALVANIZED HOG RINGS.


Perspective View

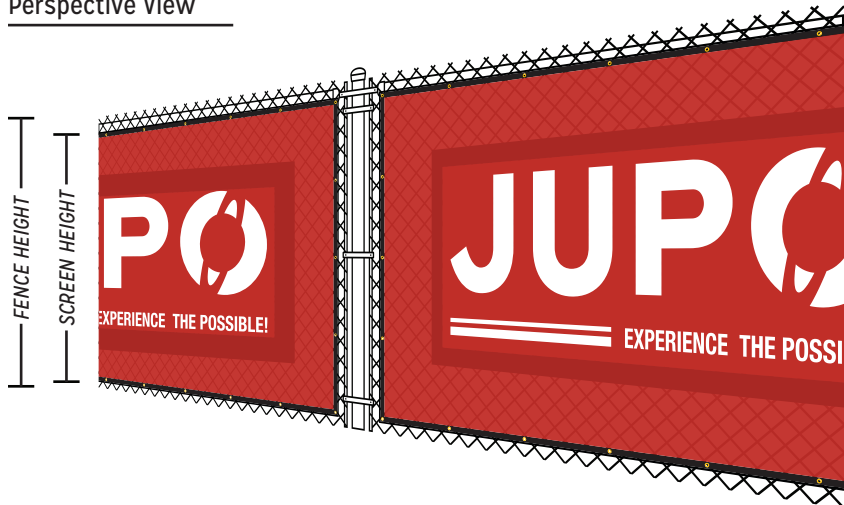

FENCESCREEN SPECIFICATIONS

PROPERTIES	LOGO BANNER RESULTS	PRIVACY SCREEN RESULTS
Filament Strength	N/A	50 lbs. per ft.
Material Break Strength	Warp: 132 lbs / Full: 126 lbs	500 lbs. per ft.
Material Weight	13.2 oz/yd ²	160 g/m ²
Crystalline Melt Point	N/A	133° C
Composition of UV Inhibitor	N/A	1.5% Amplas / 1.5% Equaster
Tensile Strength	Warp: 238 lbs / Full: 233 lbs	N/A
Thickness	0.017 in.	N/A
Flamability Point	N/A	364° C
Shade / Wind Blockage	100% / 0%	88% / 12%

Attachment Enlargement

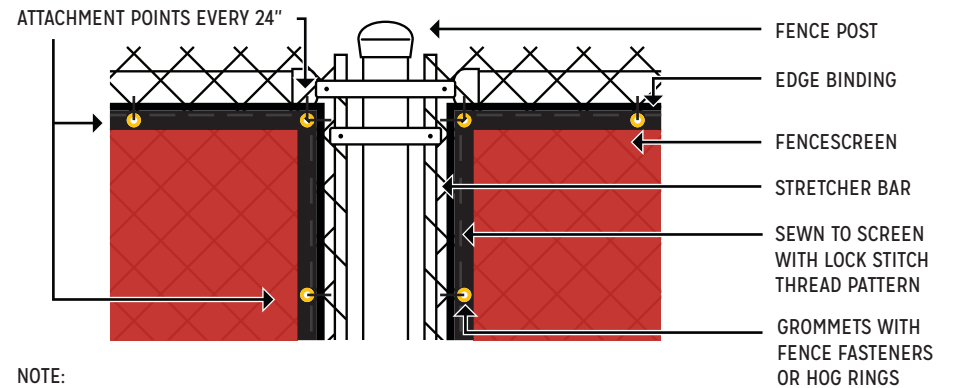

NOTE:

- INSTALL PER FENCESCREEN MANUFACTURER RECOMMENDATIONS.
- REFER TO STRUCTURAL PLANS FOR ALL FOOTING SIZES.

Available Colors for LOGO BANNER

Any color is possible for your Custom graphic or Logo (within CMYK Color Mode)

Available Colors for PS Plus

Green, Black, Tan, Royal Blue, Gray, Red, Navy Blue, White, Chestnut

Material Composition

LOGO BANNER is made from MAXFlex solid polyvinyl chloride vinyl with UV Additives

Privacy Screen Plus (PS Plus) is made from knitted high density polyethelene with UV additives.

Drawings not to scale.

Detail Name:
112 Series Stitch-On Logo
Fence Screen

Drawing Number:
FSPS200-STITCHON



PHONE: 1.888.313.6313

| www.FenceScreen.com