


2000 SERIES

FENCE PRIVACY TAPE

Elevation View

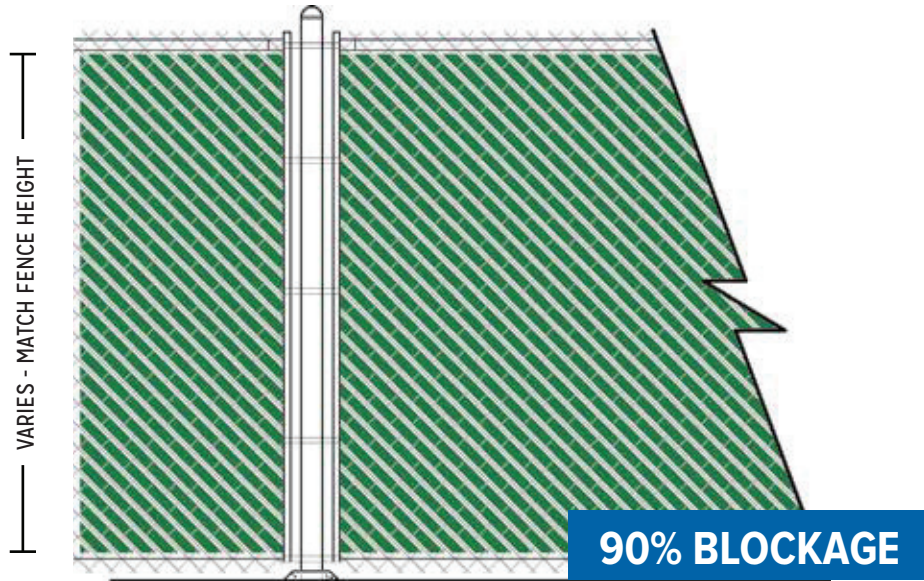

Installation instructions

STEP 1

Measure Fence Privacy Tape against diagonal of fence. Cut strips 3 inches longer to allow for 1/2" overlap on each end.

STEP 4

Pull on other end to take out most of the slack and insert brass fastener

STEP 2

Starting at either top or bottom, lay Fence Privacy Tape over one and under the next wire rung.

STEP 3

Fold over the 1/2" overlap and push fastener through Fence Privacy Tape and spread prongs.

Available Colors

Green, Black, Redwood, Beige, Brown, and White.



FENCESCREEN PROPERTIES

PROPERTIES	RESULTS
Melt Index	0.6
Density	0.92
Minimum Temp.	-30° F
Maximum Temp.	196° F
Tensile Strength	1,450 PSI
Tape Width	1 7/3"
Mesh Size	2", 2 1/4", or 2 3/8"
Wire Gauge	9, 11, 11 1/2, or 12 1/2
Average Coverage Per Box	40 square feet

Material Composition

Fence Privacy Tape is made from extruded Low Density Polyethylene (LDPE), color pigments, & UV inhibitors.

Durability

LDPE Fence products are resistant to: severe weath conditions, salt water, sand, road dirt, most acids, alcohol, alkaline, ammonia, petroleum distillates, and common environmental pollutants.

Maintenance

Pressure cleaning of surface contaminants is quickly accomplished with plain water.

Wind Load Disclaimer

FenceScreen will not be responsible for fence damage resulting from wind load conditions due to insufficient structural support.

Features

- UV-stabilized to protect against the harmful rays of the sun.

Drawings not to scale.

Detail Name:

Fence Privacy Tape

Drawing Number:

2000 - FENCE PRIVACY TAPE



PHONE: 1.888.313.6313

| www.FenceScreen.com