


# 100 SERIES


# FENCEBLOCK

Elevation View

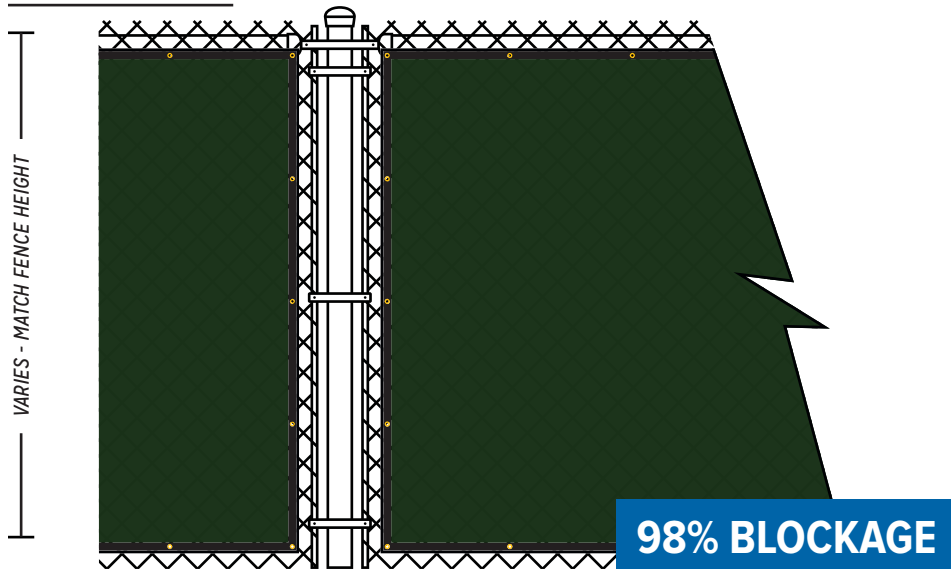

- FENCESCREEN PANELS WITH 2" POLYPROPYLENE WEBBING FOR EDGE REINFORCEMENT.
- 3/8" BRASS GROMMETS AT 24" ON CENTER ATTACH TO FENCE WITH FENCESCREEN FASTENERS OR GALVANIZED HOG RINGS.


Perspective View

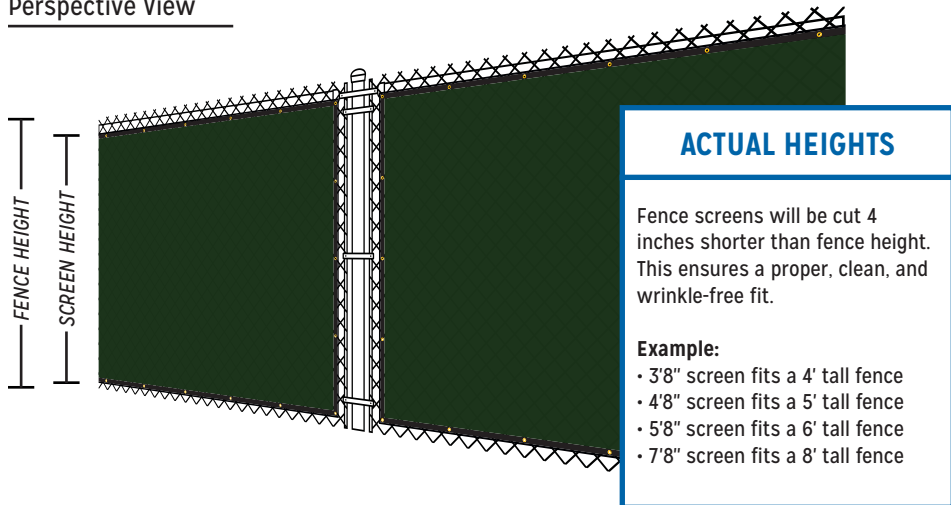

## FENCESCREEN SPECIFICATIONS

| PROPERTIES  | RESULTS                             |
|---|-------------------------------------|
| Construction (tapes/inch)                               | Warp: 20 Weft: 10                   |
| Tenacity (lb/inch)                                      | Warp: > 60 Weft: > 90               |
| Weight (oz/yd <sup>2</sup> )                            | 3.0 (±0.15 oz)                      |
| U.V. Resistance (70% Tenacity Retained After 200 Hours) | Warp: 85 Weft: 85                   |
| Water Permeability                                      | 4.2 gallons/yd <sup>2</sup> /second |
| Shade / Wind Blockage                                   | 98%                                 |

Attachment Enlargement

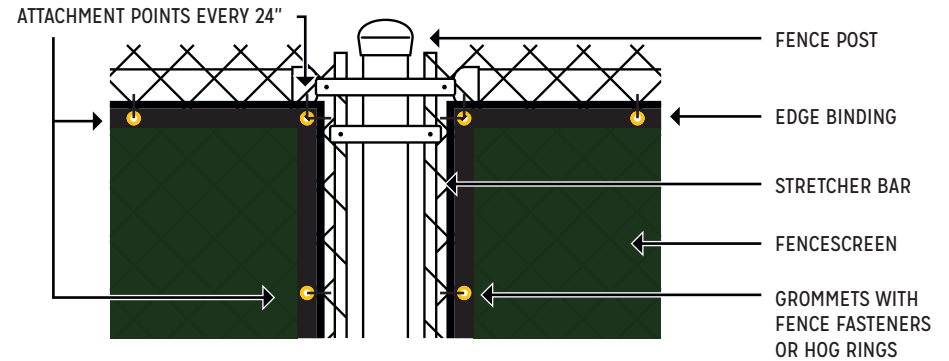

- NOTE:
- INSTALL PER FENCESCREEN MANUFACTURER RECOMMENDATIONS.
  - REFER TO STRUCTURAL PLANS FOR ALL FOOTING SIZES.

### Available Colors

Bassalt Green, Black



### Material Composition

FENCEBLOCK is made from 100% virgin polypropylene with UV additives.

*Drawings not to scale.*

**Detail Name:**  
100 Series FENCEBLOCK

**Drawing Number:**  
FSFB100



PHONE: 1.888.313.6313

www.FenceScreen.com