


**ELEVATION VIEW**

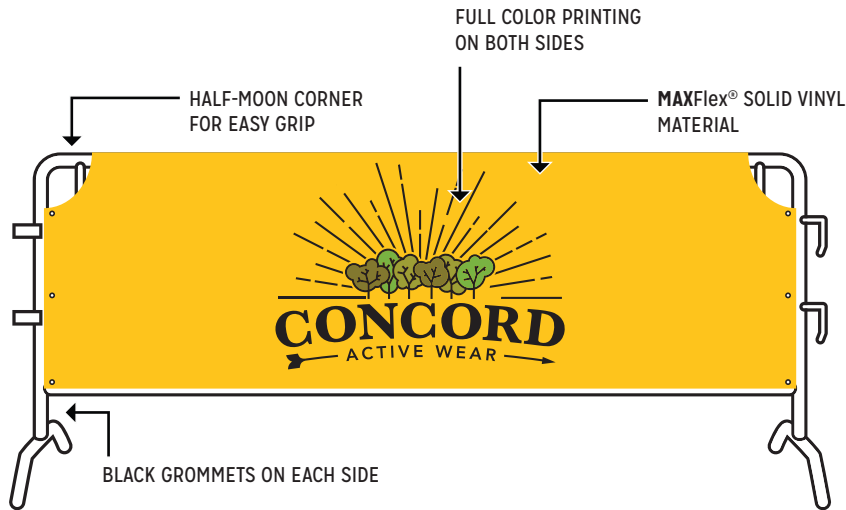

**NOTE:**  
 • INSTALL PER FENCESCREEN MANUFACTURER RECOMMENDATIONS.


**100% BLOCKAGE**

**FENCESCREEN MATERIAL SPECIFICATIONS**

**MATERIAL COMPOSITION:** MAXFLEX PROPRIETARY SOLID VINYL W/ UV-ADDITIVES  
**INK COMPOSITION:** ULTRA HIGH-DEF., CMYK MAXFLEX UV-INK, 300% INK STRETCH

PROPERTIES	RESULTS
Weight	450 g/m <sup>2</sup>
Grab Tensile	230/200 lbs.
Base Fabric	12x12 1000 Denier
Strip Tensile	200/140 lbs.
Flame Resistance	Not consumed within 2 min.
Shade Percentage	100%

**ATTACHMENT DETAIL 3D**

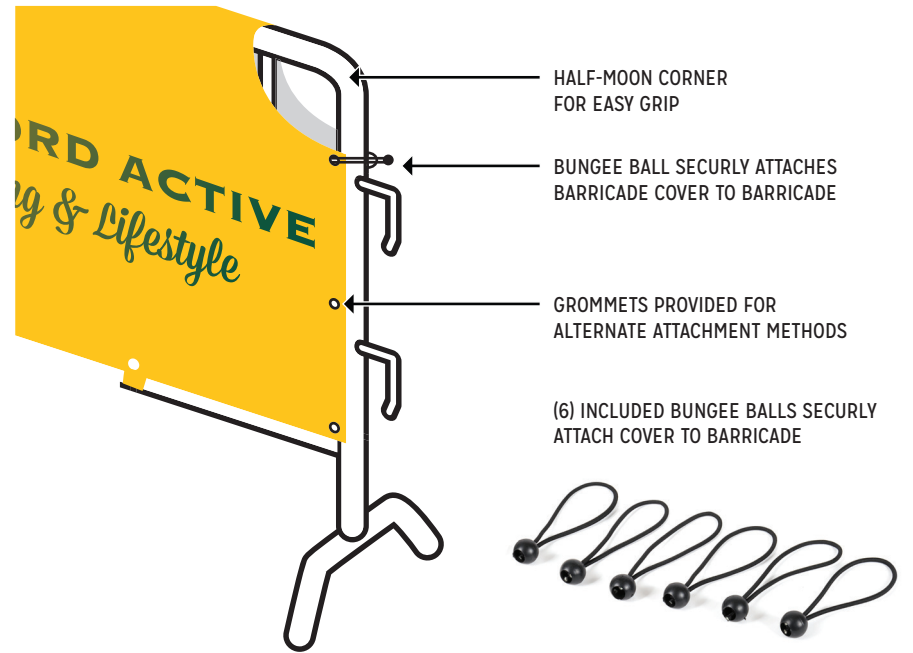

**ATTACHMENT PLACEMENTS**

(3) Black grommets spaced to avoid hooks on each side

**NOTE:**

- INSTALL PER FENCESCREEN MANUFACTURER RECOMMENDATION
- REFER TO STRUCTURAL PLANS FOR ALL FOOTING SIZE

**MATERIAL COLORS:**



**PRINTING PROPERTIES**



Printed with proprietary process  
 CMYK MaxFlex® Ink.

**811  
 SERIES**

**BARRICADE COVER**



DRAWING # **CP811 Barricade Cover**

**888-313-6313**  
**WWW.FENCESCREEN.COM**