


ELEVATION VIEW

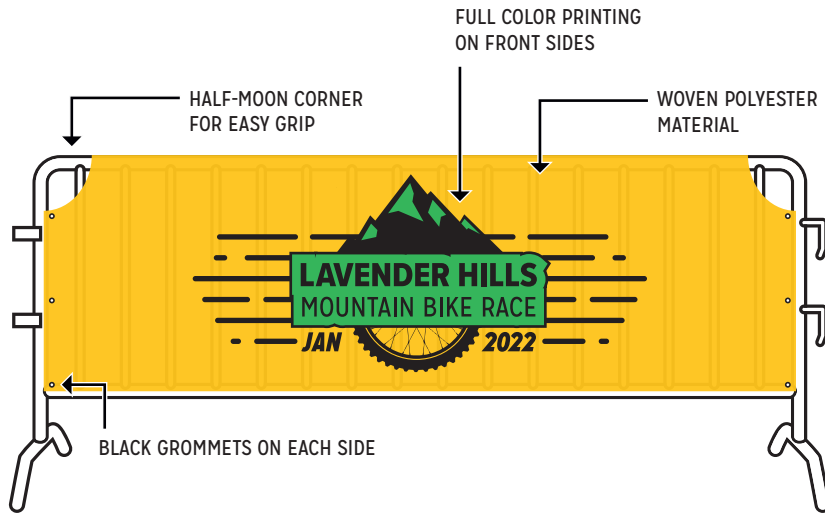

NOTE:
 • INSTALL PER FENCESCREEN MANUFACTURER RECOMMENDATIONS.

95% BLOCKAGE


FENCESCREEN MATERIAL SPECIFICATIONS

MATERIAL COMPOSITION: CLOSED WEAVE POLYESTER WITH UV-ADDITIVES

INK COMPOSITION: ULTRA HIGH-DEF., CMYK MAXFLEX UV-INK, 300% INK STRETCH

PROPERTIES	RESULTS
Material Weight	130 g/m ²
Base Material	100% Polyester
Fabric Thickness	200 Denier Tightly Woven
Moisture-Wicking	High
Heat Retention	Medium
Shade Percentage	95%
Ink	FR Rated-300% Stretch

ATTACHMENT DETAIL 3D

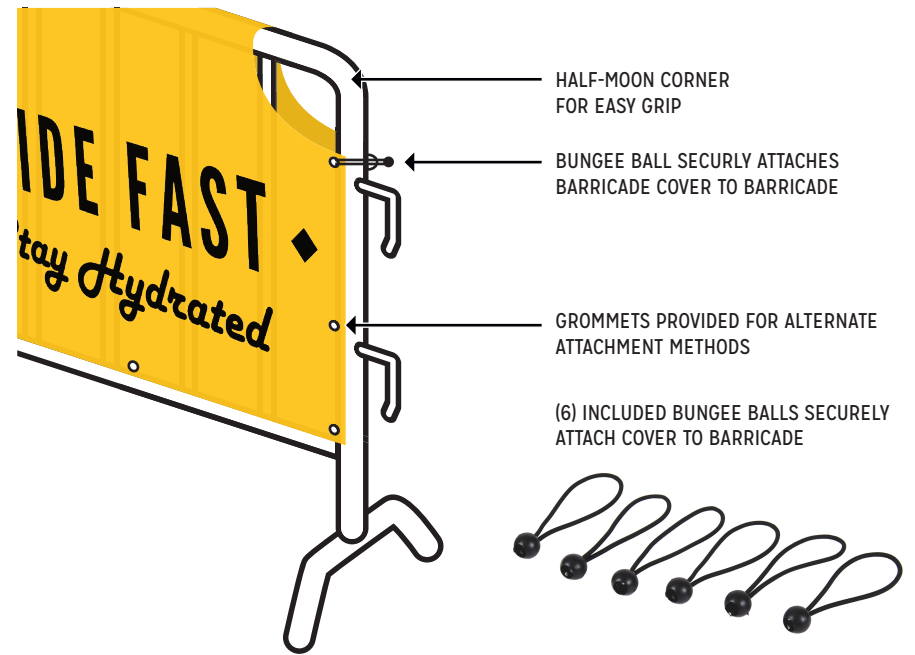

ATTACHMENT PLACEMENTS

(3) Black grommets spaced to avoid hooks on each side

NOTE:

- INSTALL PER FENCESCREEN MANUFACTURER RECOMMENDATION
- REFER TO STRUCTURAL PLANS FOR ALL FOOTING SIZE

MATERIAL COLORS:



PRINTING PROPERTIES



Printed with proprietary process
 CMYK MAXFlex® Ink.

**811
 SERIES**

BARRICADE COVER



DRAWING # CP811 Barricade Cover

888-313-6313
WWW.FENCESCREEN.COM