


900 SERIES


MESH DEBRIS TARP

Elevation View

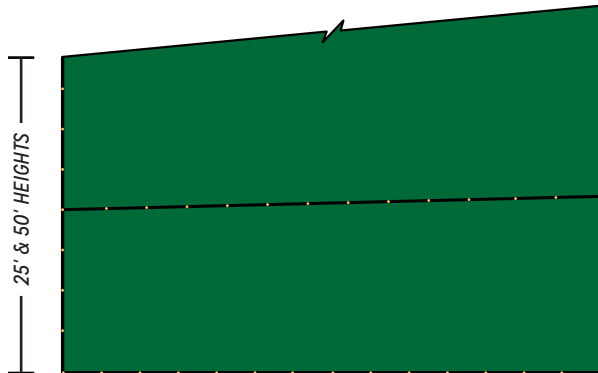

- ADDITIONAL CENTER BINDING FOR SECURE INSTALLATION
- INDUSTRIAL STRENGTH MESH WITH EDGE FINISHING ON ALL FOUR SIDES
- 4-PLY HEM GROMMETS AT 34" ON CENTER

25' x 50' Panel Application Example

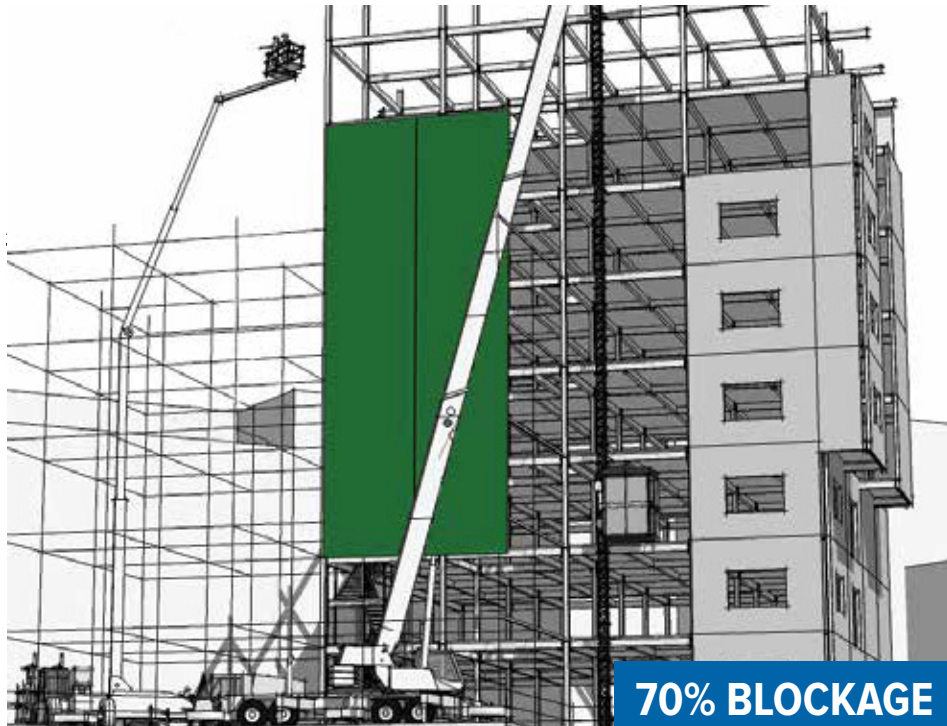

70% BLOCKAGE

FENCESCREEN SPECIFICATIONS

PROPERTIES	RESULTS
Weight (20' x 25')	23 lbs.
Weight (20' x 50')	46 lbs.
Shade Percentage	70%
Flammability Point	364°
Material Break Strength	500 lbs/ft

MATERIAL CONSTRUCTION

Building Scaffolding Tarp are made from extruded High Density Polyethylene (HDPE), color pigments, and UV inhibitors.

DURABILITY

HDPE fence products are resistant to: severe weather conditions, salt water, sand, road dirt, most acids, alcohol, alkaline, ammonia, petroleum distillates, and common environmental pollutants.

MAINTENANCE

Pressure cleaning of surface contaminants is quickly accomplished with plain water.

WIND LOAD DISCLAIMER

Fencescreen will not be responsible for fence damage resulting from wind load conditions due to insufficient structural support.

FEATURES

- Ultra Strong Mesh Material with Industrial Strength Webbing in Hem
- Heavy Duty Stitching & Grommets
- Offers Both Protection and Shade for Workers
- Keeps Debris off Neighboring Property

Available Colors

Jet Black, Safety Green



Standard Sizes

- 50' x 20'
- 25' x 20'

Drawings not to scale.

Detail Name:
900 Series Mesh Debris Tarp

Drawing Number:
FSPS900BST



PHONE: 1.888.313.6313

| www.FenceScreen.com