


522 SERIES


MAXFLEX® MESH PLUS+

Elevation View

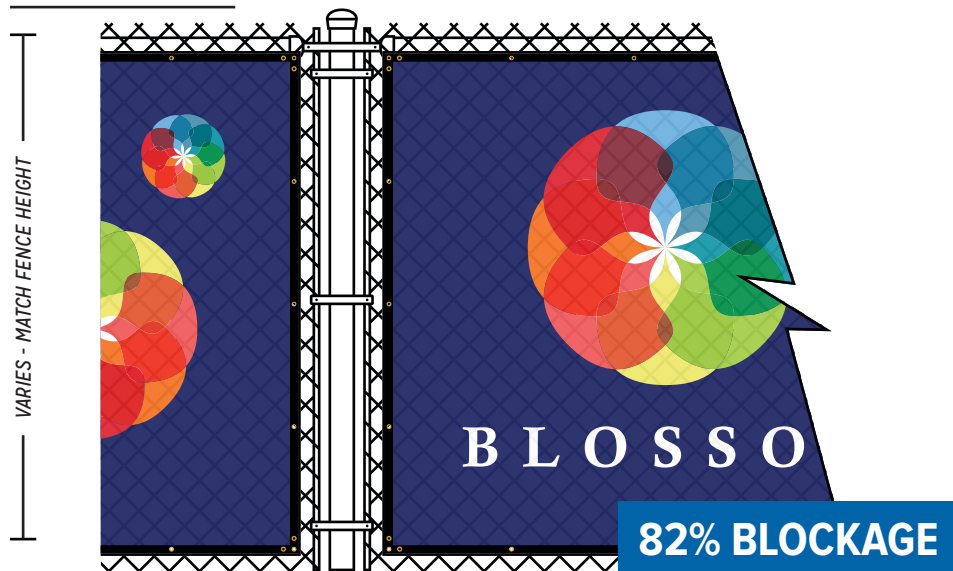

- FENCESCREEN PANELS WITH BOUND EDGE FOR REINFORCEMENT.
- 3/8" #2 BRASS GROMMETS AT 24" ON CENTER AND TRIPLE GROMMET CORNERS ATTACH TO FENCE WITH FENCESCREEN FASTENERS OR GALVANIZED HOG RINGS.

Perspective View

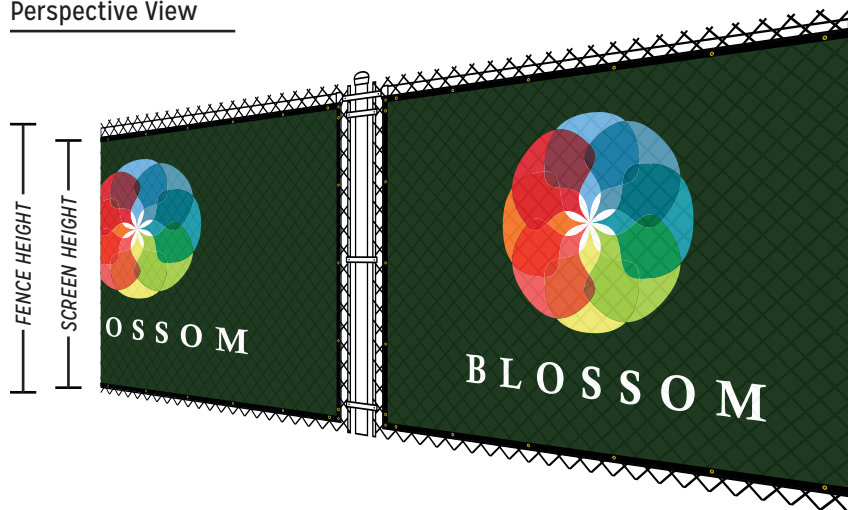


FENCESCREEN SPECIFICATIONS

| PROPERTIES | TEST METHOD | RESULTS |
|---------------------------|--------------------|--------------------|
| Total Weight | ISO 2286-2:2016 | 325 g/m2 |
| Privacy Blockage | | 82% |
| Air Permeability | ISO 9237 | 1400 l/m2/s |
| Support Fabric | ISO 2076:2013 | Polyester |
| Lineal Density | ISO 2060 | 1000 x 1000 denier |
| Coasting | ISO 2076:2013 | PVC |
| Tensile Strength | ISO 1421 | 2400 x 1500 N/5cm |
| Tear Strength (warp/weft) | DIN 53363 | 300 x 250 N |
| Fire Resistance | NFPA 701 - Test #2 | Passed |

Attachment Enlargement

ATTACHMENT POINTS EVERY 24"
TRIPLE GROMMET CORNER

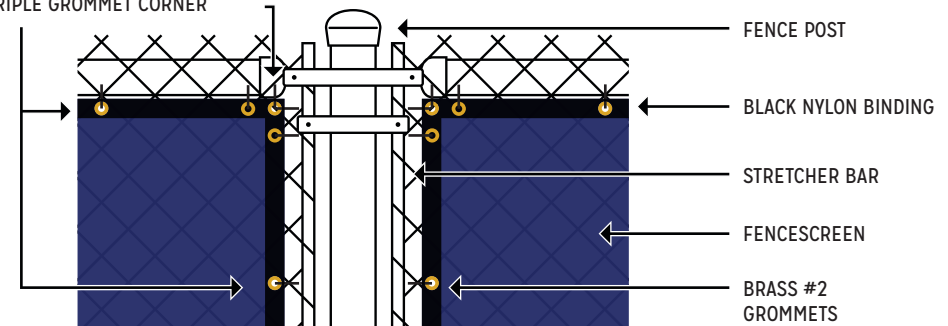

Available Material Colors

Obsidian Black, Green, Red, Cobalt Blue, and Alpine White



Printing Properties

Printed with proprietary process
CMYK MAXFlex™ ink.

Drawings not to scale.

Detail Name:
522 Custom Graphics on
Colored Mesh

Drawing Number:
FS522CP



PHONE: 1.888.313.6313

| www.FenceScreen.com