


312 SERIES

CUSTOM PRINTED FLEX MESH

Elevation View

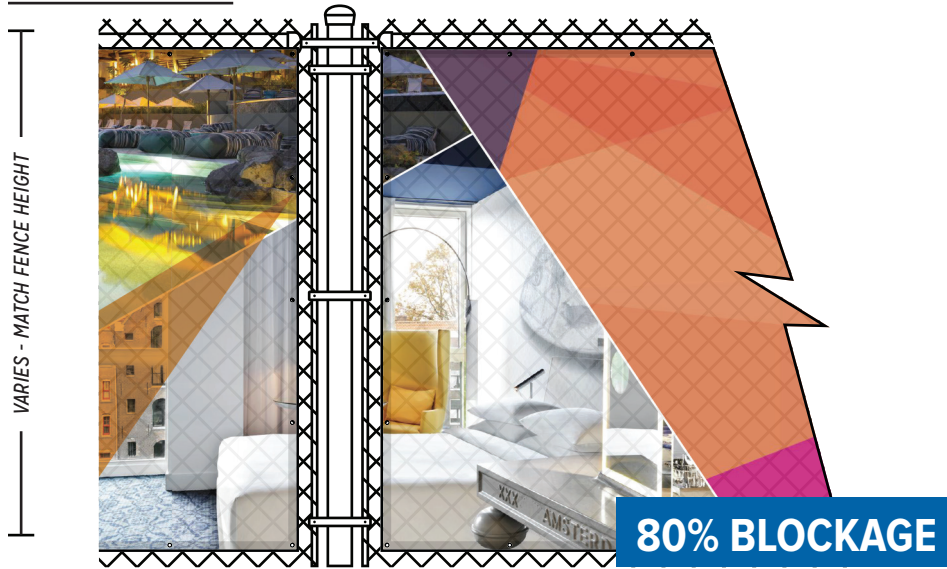

- FENCESCREEN PANELS WITH WELDED EDGE FOR REINFORCEMENT.
- 3/8" BLACK POWDER COATED BRASS GROMMETS AT 24" ON CENTER ATTACH TO FENCE WITH FENCESCREEN FASTENERS OR GALVANIZED HOG RINGS.


Perspective View



FENCESCREEN SPECIFICATIONS

PROPERTIES	RESULTS
Total Weight	280 g/m ²
Tensile Strength	1400 x 1400 N/5cm
Tear Strength	300 x 300 N/5cm
Flame Resistance	NFPA701, Title 19, CSM, ASTM E84
Low Temperature	-30°C
Air Permeability	2650 mm/sec
Shade	80%

Attachment Enlargement

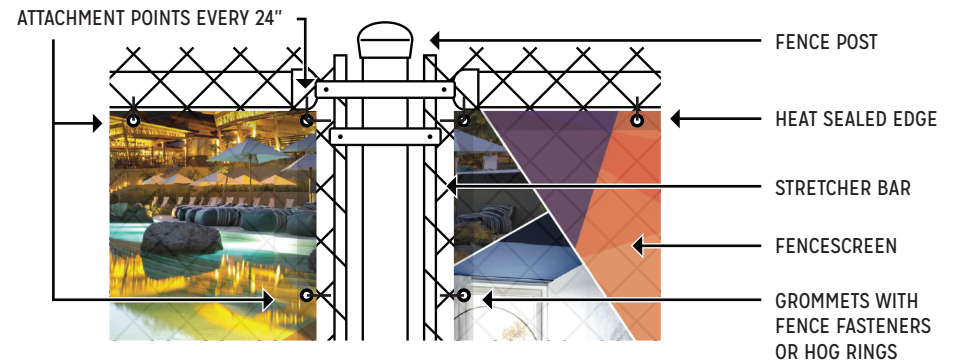

- NOTE:
- INSTALL PER FENCESCREEN MANUFACTURER RECOMMENDATIONS.
 - REFER TO STRUCTURAL PLANS FOR ALL FOOTING SIZES.

Available Colors

White



Material Composition

Custom Printed Flex Mesh is made from a proprietary polyvinyl chloride mesh with UV additives.

Printing Properties

Printed with proprietary process CMYK Max Flex Ink.

Drawings not to scale.

Detail Name:
312 Series Custom Printed
Flex Mesh Banners & Signs

Drawing Number:
FSCP312



PHONE: 1.888.313.6313

| www.FenceScreen.com