


412 SERIES

CUSTOM PRINTED SOLID VINYL

Elevation View

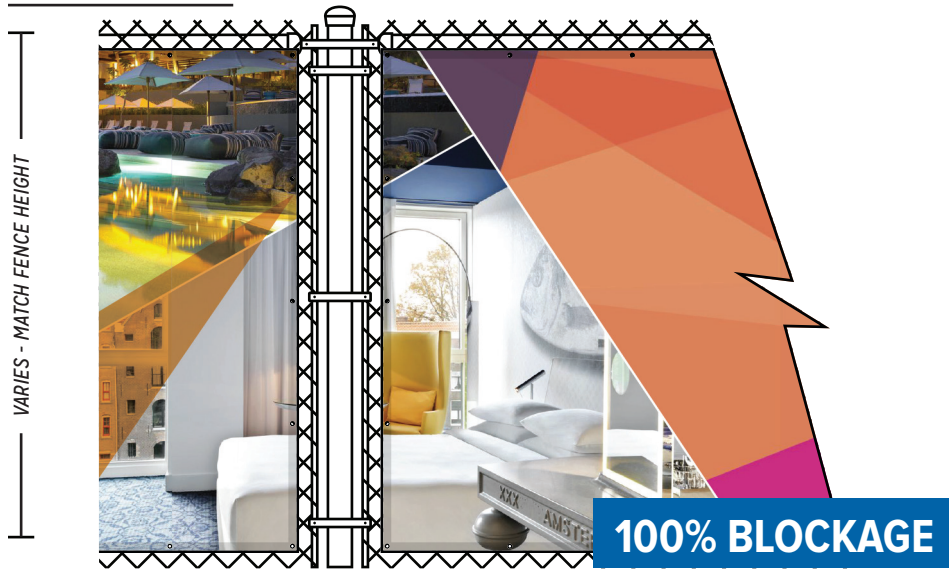

- FENCESCREEN PANELS WITH WELDED EDGE FOR REINFORCEMENT.
- 3/8" BLACK POWDER COATED BRASS GROMMETS AT 24" ON CENTER ATTACH TO FENCE WITH FENCESCREEN FASTENERS OR GALVANIZED HOG RINGS.

Perspective View




FENCESCREEN SPECIFICATIONS

PROPERTIES	RESULTS
------------	---------

Material Weight	13.2 oz/yd ²
Thickness	0.017 in
Tensile Strength	Warp: 238 lbs Fill: 233 lbs
Tear Strength	Warp: 132 lbs Fill: 126 lbs
Hydrostatic Resistance	375 lbs/in
Shade / Wind Blockage	100%

Attachment Enlargement

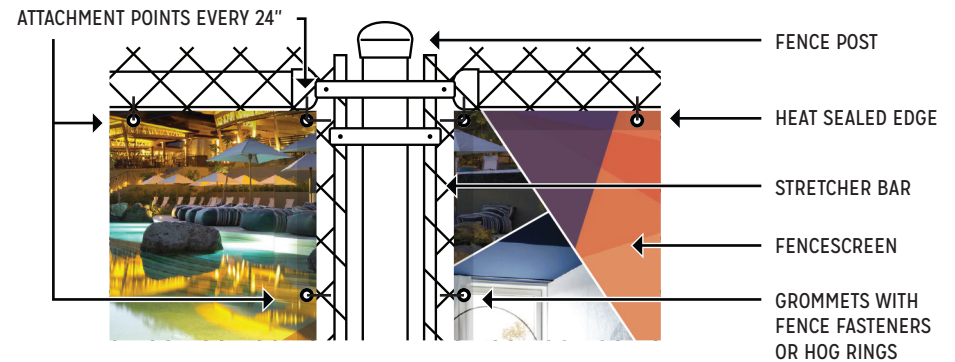

NOTE:

- INSTALL PER FENCESCREEN MANUFACTURER RECOMMENDATIONS.
- REFER TO STRUCTURAL PLANS FOR ALL FOOTING SIZES.

Available Colors

White



Material Composition

Custom Printed Solid Vinyl is made from a proprietary polyvinyl chloride vinyl with UV additives.

Printing Properties

Printed with proprietary process CMYK Max Flex Ink.

Drawings not to scale.

Detail Name:
412 Series Custom Printed
Solid Vinyl Banners & Signs

Drawing Number:
FSCP412



PHONE: 1.888.313.6313

| www.FenceScreen.com