


200 SERIES


PRIVACY SCREEN PLUS

Elevation View

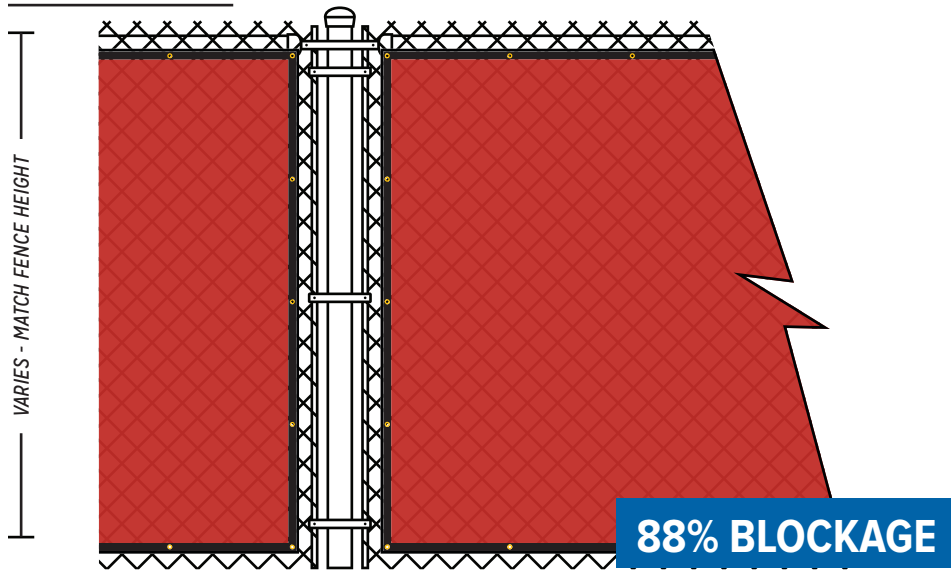

- FENCESCREEN PANELS WITH 2" POLYPROPYLENE WEBBING FOR EDGE REINFORCEMENT.
- 3/8" BRASS GROMMETS AT 24" ON CENTER ATTACH TO FENCE WITH FENCESCREEN FASTENERS OR GALVANIZED HOG RINGS.


Perspective View

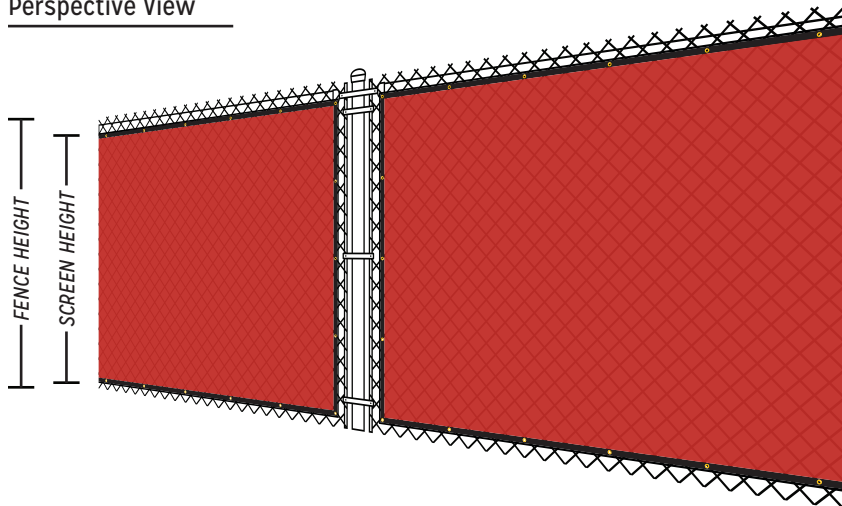

FENCESCREEN SPECIFICATIONS

PROPERTIES	RESULTS
Filament Strength	50 lbs. per ft.
Material Break Strength	500 lbs. per ft.
Material Weight	175 g/m ²
Crystalline Melt Point	133° C
Composition of UV Inhibitor	1.5% Amplas CM111821 / 1.5% Equaster CM 106000
Flamability Point	364° C
Shade / Wind Blockage	88%

Attachment Enlargement

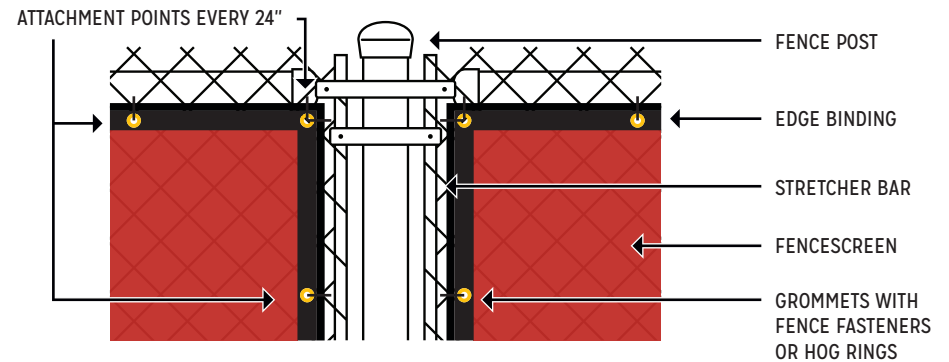

- NOTE:
- INSTALL PER FENCESCREEN MANUFACTURER RECOMMENDATIONS.
 - REFER TO STRUCTURAL PLANS FOR ALL FOOTING SIZES.

Available Colors

Green, Black, Olive, Tan, Royal Blue, White, Gray, Orange, Red, Navy Blue, Chestnut



Material Composition

Privacy Screen Plus is made from knitted high density polyethylene with UV additives.

Drawings not to scale.

Detail Name:
200 Series Privacy Screen Plus

Drawing Number:
FSPS200



PHONE: 1.888.313.6313

| www.FenceScreen.com