


7000 SERIES

REFLECTIVE FENCE TAPE

Elevation View

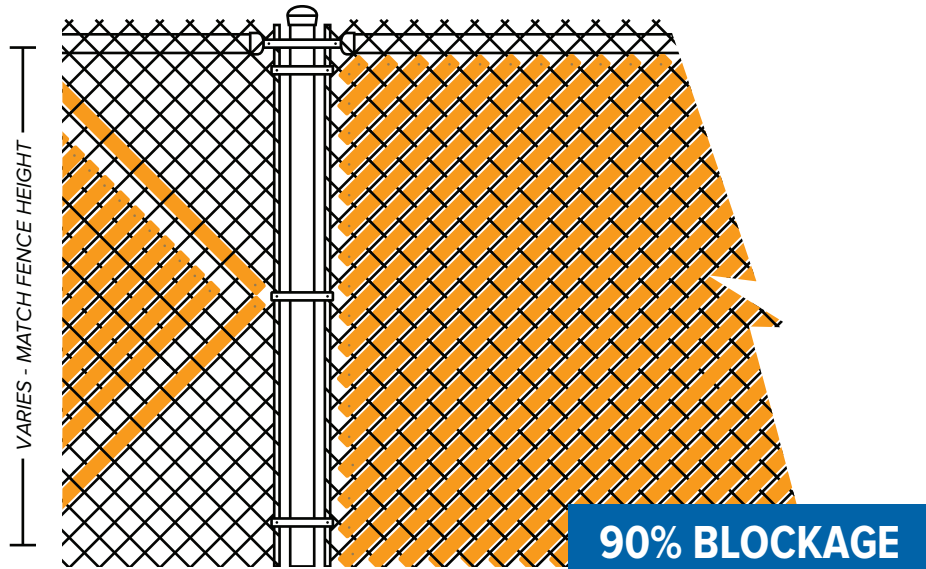

Installation instructions

STEP 1

Measure Reflective Fence Tape against diagonal of fence. Cut strips 3 inches longer to allow for 1½" overlap on each end.

STEP 4

Pull on other end to take out most of the slack and insert brass fasteners.

STEP 2

Starting at either at the top or bottom, lay Reflective Fence Tape over one and under the next wire rung.

STEP 3

Fold over the 1½" overlap and push fastener through Reflective Fence Tape and spread prongs.

FENCESCREEN PROPERTIES

PROPERTIES	RESULTS
Melt Index	0.6
Density	0.92
Anti-UV Temperature	-20 to +70° C
Tape Width	4.8 cm
Shade / Wind Blockage	90%

Material Composition

Reflective Fence Tape is made from PVC (Polyvinyl chloride) material with UV inhibitors

Durability

PVC Fence products are resistant to: severe weath conditions, salt water, sand, road dirt, most acids, alcohol, alkaline, ammonia, petroleum distillates, and common environmental pollutants.


Maintenance

Cleaning of surface contaminants is quickly accomplished with plain water.

Features

- Excellent for indicating Hazards or Warnings
- UV-stabilized to protect against the harmful rays of the sun.
- Hassle-free installation with no tools required
- Industry leading 5-year limited warranty
- Perfect for Construction Safety, Hazard Avoidance, and Directional Signage

Available Colors



Reflective Gold

Drawings not to scale.

Detail Name:
Reflective Fence Tape

Drawing Number:
7000 - REFLECTIVE FENCE TAPE



PHONE: 1.888.313.6313

| www.FenceScreen.com