



# 1625 SERIES

# RECTANGLE SUN SHADE SAIL

## Elevation View

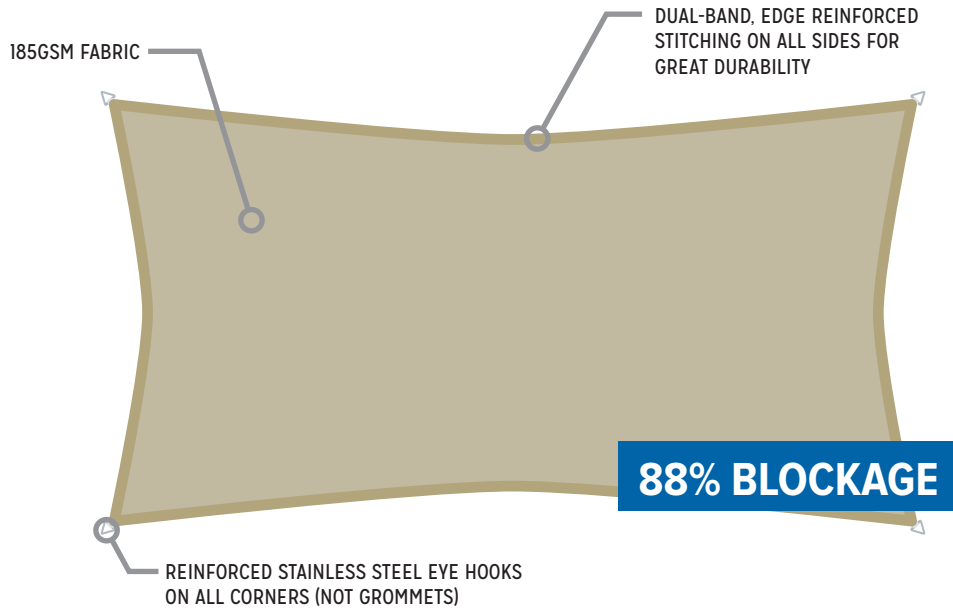


## ISOMETRIC VIEW

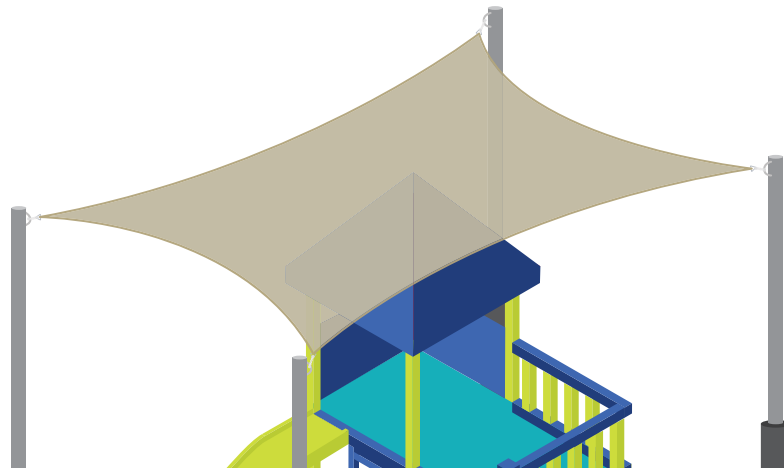

## FENCESCREEN SPECIFICATIONS

PROPERTIES	RESULTS
Filament Strength	75 lbs. per ft.
Material Break Strength	750 lbs. per ft.
Material Weight	325 g/m <sup>2</sup>
Crystalline Melt Point	133° C
Composition of UV Inhibitor	1.5% Amplas CM111821 / 1.5% Equaster CM 106000
Flamability Point	364° C
Shade / Wind Blockage	88%

## Attachment Enlargement

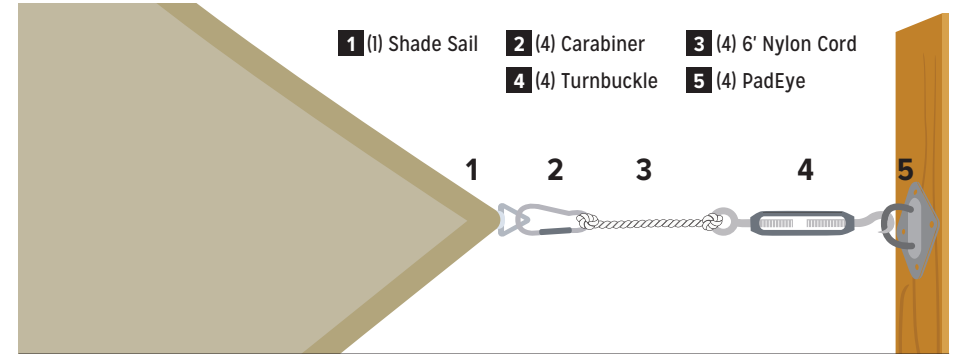

### NOTE:

- INSTALL PER FENCESCREEN MANUFACTURER RECOMMENDATIONS.
- REFER TO STRUCTURAL PLANS FOR ALL FOOTING SIZES.

### Available Colors

Green, Burgundy, Tan



### Material Composition

Rectangle Shade Sail is made from knitted high density polyethylene with UV additives and no fillers.

*Drawings not to scale.*

**Detail Name:**  
1625 Series Rectangle Shade Sail

**Drawing Number:**  
FS1625SS-RECTANGLE



PHONE: 1.888.313.6313

| [www.FenceScreen.com](http://www.FenceScreen.com)