


# 311 SERIES

# CUSTOM PRINTED FLEX MESH

Elevation View

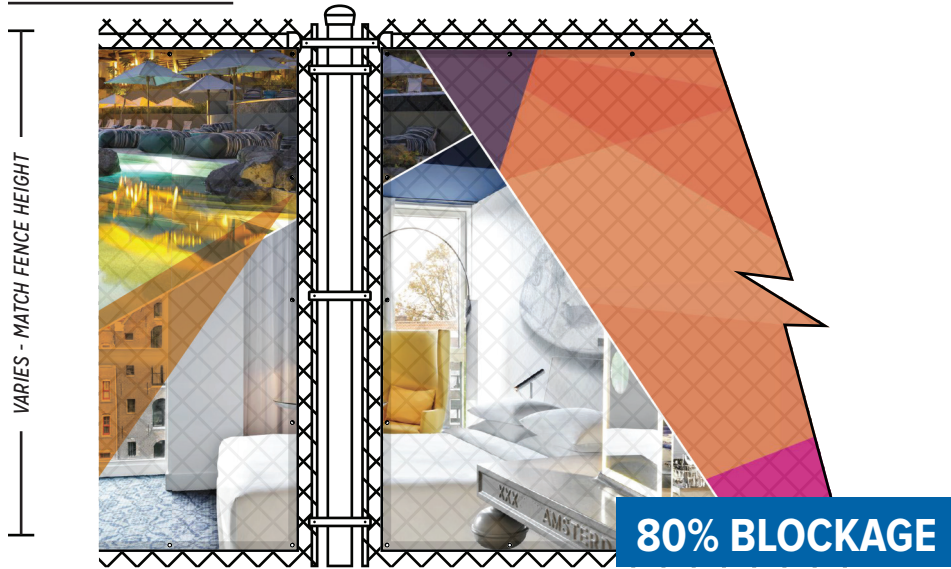

- FENCESCREEN PANELS WITH WELDED EDGE FOR REINFORCEMENT.
- 3/8" BLACK POWDER COATED BRASS GROMMETS AT 24" ON CENTER ATTACH TO FENCE WITH FENCESCREEN FASTENERS OR GALVANIZED HOG RINGS.


Perspective View



## FENCESCREEN SPECIFICATIONS

PROPERTIES	TEST METHOD	RESULTS
Total Weight	ISO 2286-2:2016	325 g/m2
Privacy Blockage		80%
Air Permeability	ISO 9237	1400 l/m2/s
Support Fabric	ISO 2076:2013	Polyester
Lineal Density	ISO 2060	1000 x 1000 denier
Coasting	ISO 2076:2013	PVC
Tensile Strength	ISO 1421	2400 x 1500 N/5cm
Tear Strength (warp/weft)	DIN 53363	300 x 250 N
Fire Resistance	NFPA 701 - Test #2	Passed

Attachment Enlargement

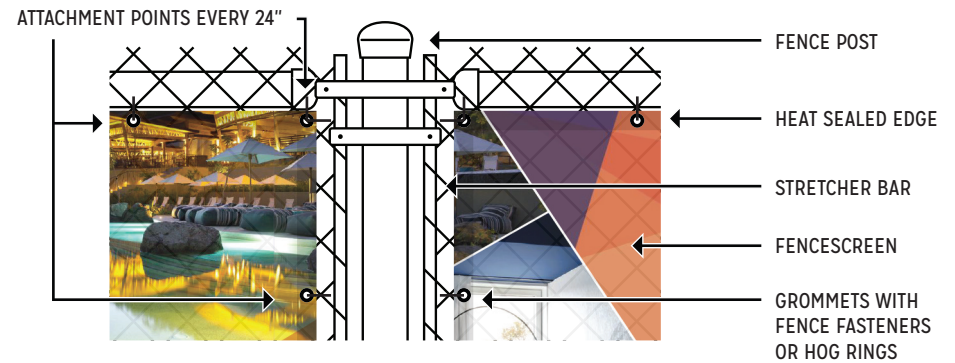

### Available Colors

White



### Material Composition

Custom Printed Flex Mesh is made from a proprietary polyvinyl chloride mesh with UV additives.

### Printing Properties

Printed with proprietary process CMYK Max Flex Ink.  
*Drawings not to scale.*

**Detail Name:**  
311 Series Custom Printed Flex Mesh

**Drawing Number:**  
FSCP311



PHONE: 1.888.313.6313

| [www.FenceScreen.com](http://www.FenceScreen.com)