


ELEVATION VIEW

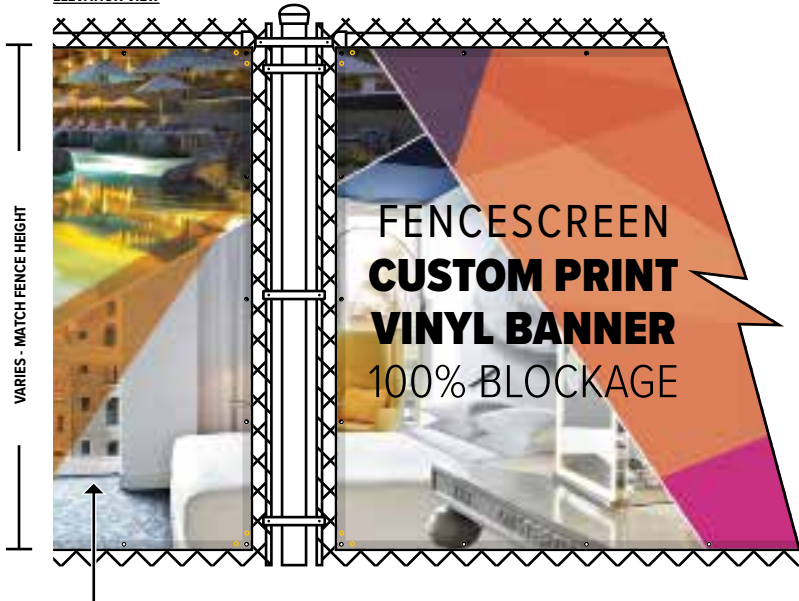

- FENCESCREEN PANELS WELDED FINISH EDGES FOR REINFORCEMENT
- #2 BLACK MILITARY GRADE COATED BRASS, SPACED 24" ON ALL SIDES
- ATTACH TO FENCE WITH FENCESCREEN FASTENERS


**FENCESCREEN MATERIAL SPECIFICATIONS**

**MATERIAL COMPOSITION:** MAXFLEX PROPRIETARY SOLID VINYL W/ UV-ADDITIVES


**INK COMPOSITION:** ULTRA HIGH-DEF., CMYK MAXFLEX UV-INK, 300% INK STRETCH

PROPERTIES	RESULTS
Weight	450 g/m <sup>2</sup>
Grab Tensile	230/200 lbs.
Base Fabric	12x12 1000 Denier
Strip Tensile	200/140 lbs.
Flame Resistance	Not consumed within 2 min.
Shade Percentage	100%

ATTACHMENT DETAIL 3D

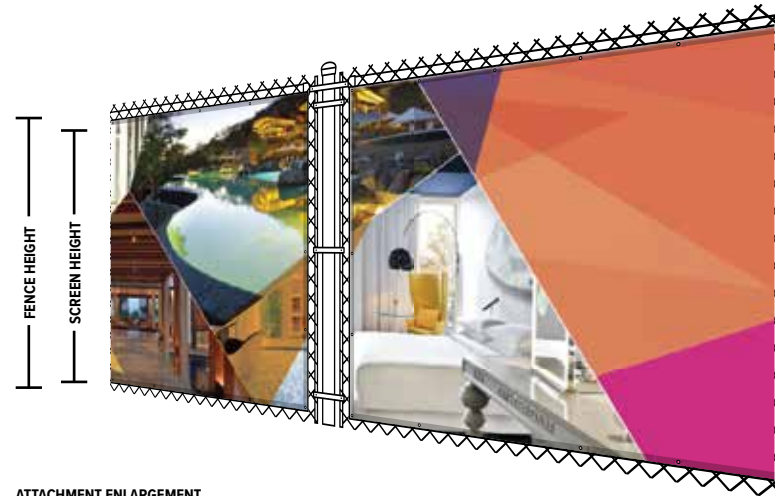

ATTACHMENT ENLARGEMENT

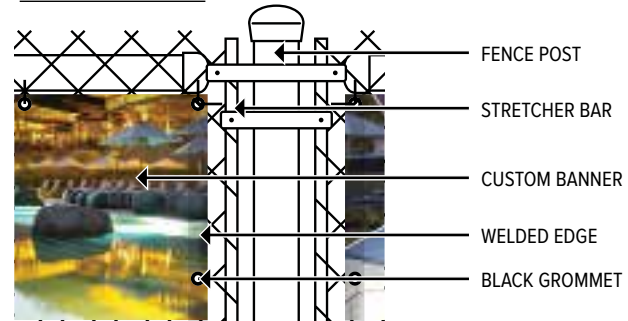

**NOTE:**

- INSTALL PER FENCESCREEN MANUFACTURER RECOMMENDATION
- REFER TO STRUCTURAL PLANS FOR ALL FOOTING SIZE

**AVAILABLE FABRIC COLORS FOR PRINT (USING CMYK COLOR INK):**

STANDARD COLORS



PREMIUM COLORS



**411  
SERIES**

**CUSTOM PRINTED  
VINYL FENCE WRAP**



DRAWING # FS411CP CUSTOM VINYL WRAP

**888-313-6313  
WWW.FENCESCREEN.COM**