



ELEVATION VIEW

**FENCESCREEN  
800 SERIES  
VCP  
75% BLOCKAGE**

FENCESCREEN PANELS WITH 2" POLYPROPELENE WEBBING FOR EDGE REINFORCEMENT.  
3/8" BRASS GROMMETS @ 24" O.C.  
ATTACH TO FENCE WITH FENCESCREEN ATTACHMENT TIES OR GALV. HOG RINGS.

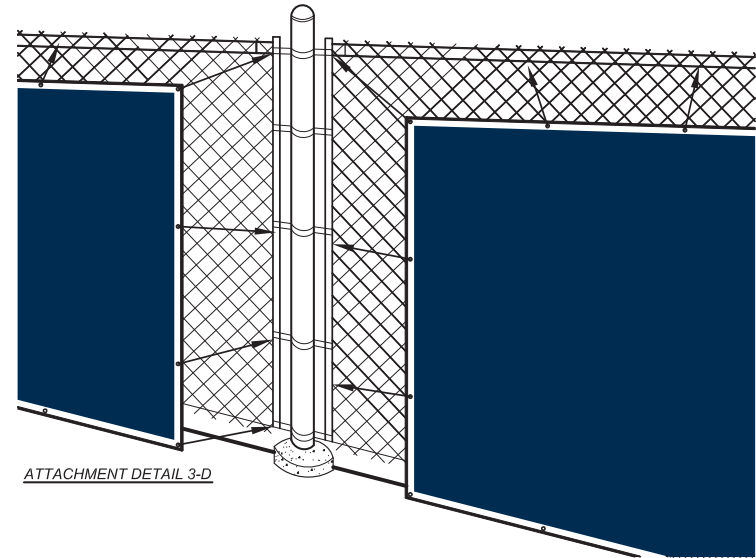

ATTACHMENT DETAIL 3-D

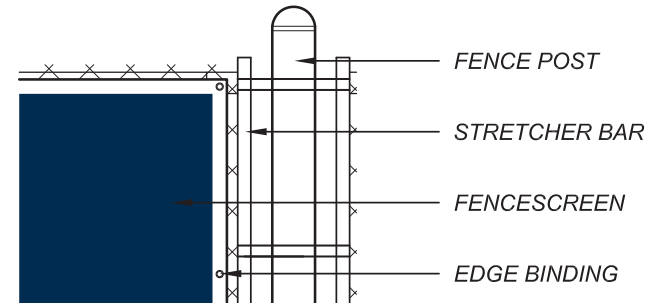

ATTACHMENT ENLARGEMENT

### FENCESCREEN SPECIFICATIONS

<b>MATERIAL</b>	9x12 1000 DENIER VINYL COATED POLYESTER
<b>WEIGHT</b>	8.5oz / square yard
<b>MATERIAL DENSITY</b>	75%
<b>TENSILE STRENGTH</b>	225 WARP x 225 FILL LBS / 1"
<b>TEAR STRENGTH</b>	85 WARP x 67 FILL LBS / 2"

#### NOTE:

1. INSTALL PER FENCESCREEN MANUFACTURER RECOMMENDATIONS.
2. REFER TO STRUCTURAL PLANS FOR ALL FOOTING SIZES.

#### AVAILABLE COLORS:

BLACK, WHITE, GREEN, YELLOW, NAVY BLUE, RED, TAN, MAROON



DRAWINGS NOT TO SCALE

DETAIL NAME:

**VCP POLY MESH  
800 SERIES**



DRAWING # **VINYL COATED POLY 800**

**PHONE: 1.888.313.6313**  
**WWW.FENCESCREEN.COM**