


1400 SERIES


BOUNDARY AIR FLOW EVENT FENCE

Elevation View

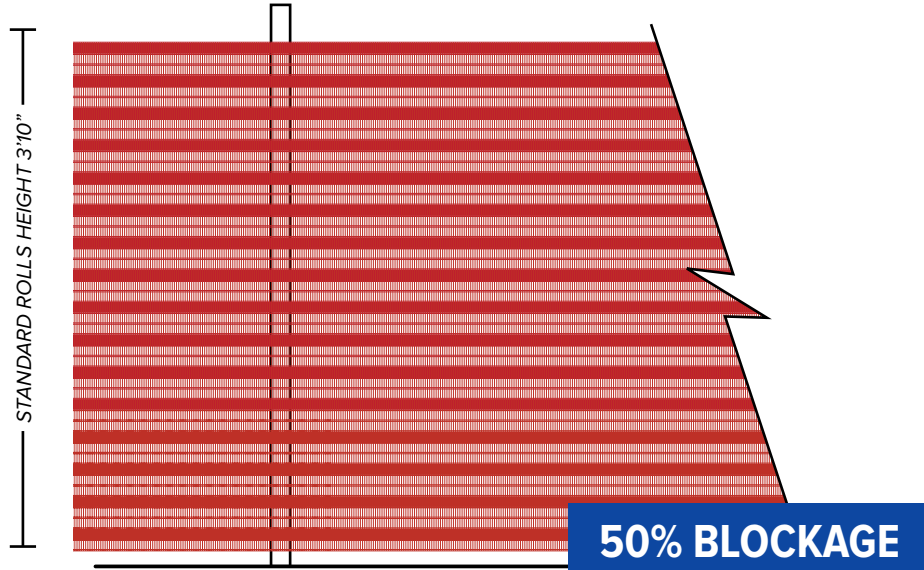

POLYESTER AND FLEXIBLE FOAMED PVC BANDED MESH MATERIAL ATTACHES TO POSTS (NOT INCLUDED) SET 10' ON CENTER USING FENCESCREEN FENCE FASTENERS.

Attachment Enlargement

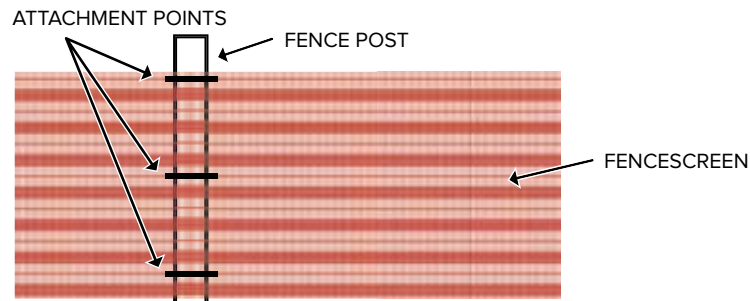

NOTE:
• INSTALL PER FENCESCREEN MANUFACTURER RECOMMENDATIONS.

FENCESCREEN PROPERTIES

PROPERTIES	RESULTS
Construction	Banded Warp 72 Ends / Foot Average
Coating	Flexible Foamed PVC
Core Yarn	Polyester
Fabric Width	46 Inch Standard
Fabric Weight	6oz. / Linear Yard
Tensile Strength	1400 lbs./Foot in Warp Width
Fire Retardancy	Self-Extinguishing in Horiz. Burn Mode
Cold Crack	No Cracking -40°
UV Resistance	1000 Hours QUV Exposure slight Discoloration

MATERIAL COMPOSITION

Boundary Air Flow Event Fence is made from polyester and flexible foamed PVC banded mesh material.

DURABILITY

PVC Fence Products are resistant to: severe weather conditions, salt water, sand, road dirt, most acids, alcohol, alkaline, ammonia, petroleum distillates and common environmental pollutants.

MAINTENANCE

Pressure cleaning of surface contaminants is quickly accomplished with plain water.

STANDARD ROLL SIZE

150' x 3'10", posts sold separately.

FEATURES

- UV stabilized to protect against the harmful rays of the sun.
- Design to withstand extreme climates.
- Super durable and re-usable.

Available Colors

Green, Black, Red, Orange, Florescent Orange, Blue, Yellow, Tan, White



Drawings not to scale.

Detail Name:

1400 Series Boundary Air Flow
Event Fence

Drawing Number:

1400 - BOUNDARY AIR



PHONE: 1.888.313.6313

| www.FenceScreen.com